

# POWERSPORT SERIES

KEEPING YOU **IN CHARGE**  
WITH PERFORMANCE  
AND RELIABILITY



**NEW**  
HYPER SPORT  
LITHIUM  
SERIES



**GO**  
POWER SONIC

**POWERPSONIC**  
TRUSTED BATTERY SOLUTIONS

[power-sonic.com](http://power-sonic.com)



# POWERSPORT SERIES

## MAXIMUM PERFORMANCE AND ULTIMATE RELIABILITY FROM POWER SONIC

Whether you're racing on the track, exploring extreme off road trails, cruising the highway or riding through deep snow, Power Sonic has the right battery solution for you.

2

As an OEM qualified supplier we offer a complete line of Powersport batteries engineered to the highest international standards by our ISO:9001 and ISO:14001 certified factory. Our Powersport batteries are designed to provide maximum performance, superior starting power and unrivalled reliability whatever the vehicle.

Featuring a comprehensive range of sizes and battery types, Power Sonic Powersports batteries are one of the best choices available on the market today, suitable for a diverse range of applications including:

- **Motorcycles**
- **Scooters**
- **ATV's**
- **Personal Watercraft**
- **Snowmobiles**
- **Utility Vehicles**
- **Lawn and Garden**

All Power Sonic batteries are subject to stringent quality control through every step of the manufacturing process ensuring both consistency and reliability.



# CONTENTS

BATTERY SELECTION GUIDE ..... 5

SUPER SPORT SERIES  
CONVENTIONAL ..... 6

SUPER SPORT SERIES  
LOCALLY ACTIVATED AGM ..... 10

SUPER SPORT SERIES  
AGM READY TO GO ..... 12

ULTRA SPORT SERIES  
HIGH PERFORMANCE AGM ..... 14

 HYPER SPORT SERIES  
LITHIUM ..... 16

TERMINAL CONFIGURATIONS ..... 18

BATTERY TYPE NUMBER EXPLANATION ..... 20

BATTERY UPGRADE REFERENCE CHART ..... 21



**POWER PS SONIC**

TRUSTED BATTERY SOLUTIONS

# KEEPING YOU IN CHARGE

4

BATTERY SELECTION GUIDE



**MAXIMUM PERFORMANCE AND ULTIMATE  
RELIABILITY FROM POWER SONIC**



# KEEPING YOU IN CHARGE WITH THE POWER SONIC BATTERY SELECTION GUIDE



Power Sonic offers a complete battery line for all your powersport needs. Our batteries are designed to provide high-performance and ultimate reliability for those who demand the best from their vehicle. Manufactured using the most advanced components and latest state-of-the-art equipment our products have become renowned for their quality and reliability.

BATTERY TYPE >	SUPER SPORT			ULTRA SPORT	HYPHER SPORT
	CONVENTIONAL	LOCALLY ACTIVATED AGM	AGM READY TO GO	HIGH PERFORMANCE AGM	LITHIUM
<b>PERFORMANCE</b>	Good power, good cycle life, meets entry-level and older vehicle OE specs	Superior power, extended cycle life, vibration resistant, good safety features, long shelf life, meets current OE specs	Superior power, extended cycle life, great safety features, highly vibration resistant, meets current OE specs	Superior capacity, enhanced performance, maximum cycle life, maximum safety features, highly vibration resistant, lower discharge rate, exceeds OE specs	Ultra lightweight, ultimate performance, extreme cycle life, highly vibration resistant, very low self discharge, faster charging, far exceeds OE specs
<b>RECOMMENDED VEHICLE TYPE</b>	Suitable for entry-level and older vehicles that have basic power needs	Fits most applications	Ideal for high-end motorcycles, ATVs, and off-road vehicles	Ideal for premium vehicles with built-in or add-on electrical equipment	The ultimate choice for sports bikes and seasonal use vehicles
<b>RECOMMENDED APPLICATIONS</b>	Scooters Lawn & Garden	Motorcycles Scooters	UTVs ATVs	Snowmobiles Personal Watercraft	Motorcycles Scooters UTVs ATVs Personal Watercraft
<b>READY TO GO</b>	Initial filling required	Initial filling required	Ready to Go	Ready to Go	Ready to Go
<b>POSITIONING</b>	Upright mounting only	Medium inclination	High inclination	High inclination	Multiple positions
<b>ACID PACK INCLUDED</b>	Acid pack included	Acid pack included	No initial filling	No initial filling	No acid
<b>MAINTENANCE</b>	Requires ongoing filling	Maintenance free after initial filling	100% maintenance free	100% maintenance free	100% maintenance free
<b>TECHNOLOGY</b>	Flooded dry charged	AGM dry charged	AGM charged	AGM charged	Lithium Iron Phosphate

**FURTHER INFORMATION**

Please refer to our website [www.power-sonic.com](http://www.power-sonic.com) for product catalogs, safety data sheets (SDS), ISO certification, etc.



# CONVENTIONAL

**SUPER SPORT CONVENTIONAL** batteries are designed for entry-level and older powersport vehicles with basic power requirements. Conventional batteries are flooded lead acid batteries that need to fill before first use and periodically topped up to maintain.

**BENEFITS:**

- Engineered to protect against corrosion and withstand vibration
- Delivers high cranking power
- Acid pack and vent tube included for initial filling
- Long shelf life, with no need to recharge before initial acid filling
- Wide variety of battery sizes including 6V and 12V versions
- High performance and low maintenance versions available
- Ideal for ride on mowers and garden equipment

6



MOTORCYCLE

SCOOTER

ATV

PERSONAL WATERCRAFT

SNOWMOBILE

UTV

RIDING MOWER



## 6 VOLT SPECIFICATIONS

Model	Voltage V	Capacity at 10HR Ah	CCA @ 0°F -18°C	Approx. Weight w/o Acid		Acid Volume oz.	Regular Charge Current Ah	Terminal (See page 19)	Dimensions: inch (mm)						Assembly Figure (per cover polarity)
				lbs.	kgs.				Length		Width		Height		
									inch	mm	inch	mm	inch	mm	
6N2-2A	6	2	20	1.0	0.5	3.4	0.2	—	2 3/4	70	1 7/8	47	3 3/4	96	
6N2-2A-1	6	2	20	1.0	0.5	3.4	0.2	—	2 3/4	70	1 7/8	47	3 3/4	96	
6N2-2A-3	6	2	20	1.0	0.5	3.4	0.2	—	2 3/4	70	1 7/8	47	3 3/4	96	
6N2-2A-4	6	2	20	1.0	0.5	3.4	0.2	—	2 3/4	70	1 7/8	47	3 3/4	96	
6N2-2A-8	6	2	20	1.0	0.5	3.4	0.2	—	2 3/4	70	1 7/8	47	3 3/4	96	
6N2A-2C	6	2	20	1.0	0.5	3.4	0.2	—	2 3/4	70	1 7/8	47	4 3/16	106	
6N2A-2C-3	6	2	20	1.0	0.5	3.4	0.2	—	2 3/4	70	1 7/8	47	4 3/16	106	
6N4-2A	6	4	25	1.4	0.6	6.8	0.4	—	2 13/16	71	2 13/16	71	3 3/4	96	
6N4-2A-2	6	4	25	1.4	0.6	6.8	0.4	—	2 13/16	71	2 13/16	71	3 3/4	96	
6N4-2A-3	6	4	25	1.4	0.6	6.8	0.4	—	2 13/16	71	2 13/16	71	3 3/4	96	
6N4-2A-4	6	4	25	1.4	0.6	6.8	0.4	—	2 13/16	71	2 13/16	71	3 3/4	96	
6N4-2A-5	6	4	25	1.4	0.6	6.8	0.4	—	2 13/16	71	2 13/16	71	3 3/4	96	
6N4-2A-8 (6)	6	4	25	1.4	0.6	6.8	0.4	—	2 13/16	71	2 13/16	71	3 3/4	96	
6N4A-4D	6	4	35	1.5	0.7	6.8	0.4	—	2 3/8	61	2 1/4	57	5 1/8	131	
6N4B-2A	6	4	24	1.3	0.6	6.8	0.4	—	4	102	1 7/8	48	3 3/4	96	
6N4B-2A-3	6	4	24	1.3	0.6	6.8	0.4	—	4	102	1 7/8	48	3 3/4	96	
6N4B-2A-5	6	4	24	1.3	0.6	6.8	0.4	—	4	102	1 7/8	48	3 3/4	96	
6N4C-1B	6	4	24	1.5	0.7	6.8	0.4	—	2 13/16	71	2 13/16	71	4 1/8	105	
6N5.5-1D	6	5.5	40	1.9	0.9	10.1	0.6	—	3 9/16	90	2 3/4	70	3 15/16	100	
6N5.5-1D-1	6	5.5	40	1.9	0.9	10.1	0.6	—	3 9/16	90	2 3/4	70	3 15/16	100	
6N6-1B	6	6	48	1.9	0.9	10.1	0.6	—	3 7/8	99	2 1/4	57	4 3/8	111	
6N6-1D-2	6	6	48	1.9	0.9	10.1	0.6	—	3 7/8	99	2 1/4	57	4 3/8	111	
6N6-3B	6	6	48	1.8	0.8	10.1	0.6	6	3 7/8	99	2 1/4	57	4 3/8	111	
6N6-3B-1	6	6	48	1.8	0.8	10.1	0.6	6	3 7/8	99	2 1/4	57	4 3/8	111	
6CB8L-B	6	8	64	2.8	1.3	10.5	0.8	6	4 3/4	120	2 3/4	70	3 3/4	95	
6N11-2D	6	11	88	3.4	1.5	13.5	1.1	6	5 7/8	150	2 3/4	70	3 15/16	100	
6N11A-1B	6	11	88	2.8	1.3	13.5	1.1	6	4 13/16	122	2 7/16	62	5 1/8	131	
6N12A-2D	6	12	96	3.2	1.5	15.2	1.2	6	6 1/8	156	2 1/4	57	4 9/16	116	
B38-6A	6	13	104	3.5	1.6	21.0	1.3	6	4 11/16	119	3 1/4	83	6 15/16	161	
B39-6	6	7	60	2.2	1.0	10.1	0.7	6	4 15/16	126	1 7/8	48	4 15/16	126	
B54-6	6	12	96	3.8	1.7	16.9	1.2	6	6 1/8	156	2 1/4	57	4 9/16	116	

## 12 VOLT SPECIFICATIONS

Model	Voltage V	Capacity at 10HR Ah	CCA @ 0°F -18°C	Approx. Weight w/o Acid		Acid Volume oz.	Regular Charge Current Ah	Terminal (See page 19)	Dimensions: inch (mm)						Assembly Figure (per cover polarity)
				lbs.	kgs.				Length		Width		Height		
									inch	mm	inch	mm	inch	mm	
12N5-3B	12	5	40	3.3	1.5	13.5	0.5	6	4 3/4	120	2 3/8	60	5 1/8	130	
12N5-4B	12	5	40	3.3	1.5	13.5	0.5	6	4 3/4	120	2 3/8	60	5 1/8	130	
12N5.5-3B	12	5.5	60	3.6	1.6	13.5	0.6	6	5 5/16	135	2 3/8	60	5 1/8	130	
12N5.5-4A	12	5.5	60	3.6	1.6	13.5	0.6	6	5 5/16	135	2 3/8	60	5 1/8	130	
12N5.5A-3B	12	5.5	44	4.0	1.8	16.9	0.6	6	4 1/16	103	3 9/16	90	4 1/2	114	
12N7-4A	12	7	90	4.0	1.8	16.9	0.7	6	5 5/16	135	3	75	5 1/4	133	
12N7-3B	12	7	90	4.0	1.8	16.9	0.7	6	5 5/16	135	3	75	5 1/4	133	
12N7D-3B	12	7	75	4.2	1.9	20.3	0.7	6	5 5/16	135	3	75	5 15/16	150	
12N7-4B	12	7	90	4.0	1.8	16.9	0.7	6	5 5/16	135	3	75	5 1/4	133	
12N9-3A-1	12	9	90	5.0	2.3	20.3	0.9	6	5 5/16	135	3	75	5 1/2	139	
12N9-3B	12	9	90	4.8	2.2	20.3	0.9	6	5 5/16	135	3	75	5 1/2	139	
12N9-4B-1	12	9	90	4.8	2.2	20.3	0.9	6	5 5/16	135	3	75	5 1/2	139	
12N10-3A	12	10	95	5.1	2.3	27.0	1.0	6	5 5/16	135	3 9/16	90	5 3/4	145	
12N10-3A-1	12	10	95	5.1	2.3	27.0	1.0	6	5 5/16	135	3 9/16	90	5 3/4	145	
12N11-3A-1	12	11	103	7.5	3.4	27.0	1.1	8	5 5/16	135	3 9/16	90	6 1/8	155	
12N12A-4A-1	12	12	113	6.3	2.9	23.7	1.2	6	5 5/16	134	3 3/16	80	6 15/16	160	
12N14-3A	12	14	128	7	3.2	27.0	1.4	8	5 5/16	134	3 1/2	89	6 9/16	166	
12N24-3	12	24	218	11.1	5.0	40.6	2.4	3	7 1/4	184	4 7/8	124	6 7/8	175	
CHD4-12 (H-12)	12	30*	280	14.1	6.4	74.4	3.0	9	8 1/8	206	5 1/4	133	6 1/2	165	

\*@20hr rate

## 12 VOLT LAWN AND GARDEN SPECIFICATIONS

Model	Voltage V	Capacity at 10HR Ah	CCA @ 0°F -18°C	Approx. Weight w/o Acid		Acid Volume oz.	Regular Charge Current Ah	Terminal (See page 19)	Dimensions: inch (mm)						Assembly Figure (per cover polarity)
				lbs.	kgs.				Length		Width		Height		
									inch	mm	inch	mm	inch	mm	
U1(9)	12	24	200	11.3	5.1	60.9	2.4	14	7 3/4	196	5 1/4	131	7 1/8	181	
U1(9)R	12	24	200	11.3	5.1	60.9	2.4	14	7 3/4	196	5 1/4	131	7 1/8	181	

## FURTHER INFORMATION

Please refer to our website [www.power-sonic.com](http://www.power-sonic.com) for product catalogs, safety data sheets (SDS), ISO certification, etc.



# CONVENTIONAL

**SUPER SPORT CONVENTIONAL** batteries are designed for entry-level and older powersport vehicles with basic power requirements. Conventional batteries are flooded lead acid batteries that need to fill before first use and periodically topped up to maintain.

**BENEFITS:**

- Engineered to protect against corrosion and withstand vibration
- Delivers high cranking power
- Acid pack and vent tube included for initial filling
- Long shelf life, with no need to recharge before initial acid filling
- Wide variety of battery sizes including 6V and 12V versions
- High performance and low maintenance versions available
- Ideal for ride on mowers and garden equipment



MOTORCYCLE

SCOOTER

ATV

PERSONAL WATERCRAFT

SNOWMOBILE

UTV





# SUPER SPORT SERIES

## LOW MAINTENANCE SPECIFICATIONS

Model	Voltage		Capacity at 10HR	CCA @ 0°F	Approx. Weight w/o Acid		Acid Volume	Regular Charge Current	Terminal	Dimensions: inch (mm)						Assembly Figure (per cover polarity)
	V	Ah			lbs.	kgs.				oz.	Length		Width		Height	
			inch	mm			inch	mm	inch		mm					
CB16-B-LM	12	19	230	230	10.6	4.8	40.6	1.9	6	6 7/8	175	4	100	6 1/8	155	
CB16HL-A-LM	12	19	230	230	10.6	4.8	40.6	1.9	6	6 7/8	175	4	100	6 1/8	155	
C50-N18L-A-LM	12	20	220	220	10.3	4.7	47.3	2.0	7	8 1/8	205	3 9/16	90	6 7/8	162	

## HIGH PERFORMANCE SPECIFICATIONS

Model	Voltage		Capacity at 10HR	CCA @ 0°F	Approx. Weight w/o Acid		Acid Volume	Regular Charge Current	Terminal	Dimensions: inch (mm)						Assembly Figure (per cover polarity)
	V	Ah			lbs.	kgs.				oz.	Length		Width		Height	
			inch	mm			inch	mm	inch		mm					
CB2.5L-C	12	2.5	20	20	1.9	0.9	8.1	0.3	—	3 3/16	80	2 3/4	70	4 1/8	105	
CB2.5L-C-1	12	2.5	20	20	1.9	0.9	8.1	0.3	—	3 3/16	80	2 3/4	70	4 1/8	105	
CB3L-A	12	3	32	32	2.3	1.0	8.1	0.3	6	3 7/8	98	2 1/4	56	4 3/8	110	
CB3L-B	12	3	32	32	2.3	1.0	8.1	0.3	6	3 7/8	98	2 1/4	56	4 3/8	110	
CB4L-A	12	4	40	40	2.6	1.2	10.1	0.4	5	4 3/4	120	2 3/4	70	3 5/8	92	
CB4L-B	12	4	40	40	2.6	1.2	10.1	0.4	5	4 3/4	120	2 3/4	70	3 5/8	92	
CB5L-B	12	5	50	50	3.2	1.5	12.2	0.5	6	4 3/4	120	2 3/8	60	5 1/8	130	
CB7-A	12	8	90	90	4.7	2.1	20.3	0.8	6	5 5/16	135	3	75	5 1/4	133	
CB7C-A	12	8	80	80	5.2	2.4	20.3	0.8	1	5 1/8	130	3 9/16	90	4 1/2	114	
CB7L-B	12	8	90	90	4.7	2.1	20.3	0.8	3	5 5/16	135	3	75	5 1/4	133	
CB9-B	12	9	90	90	4.8	2.2	20.3	0.9	6	5 5/16	135	3	75	5 1/2	139	
CB9A-A	12	9	90	90	5.0	2.3	20.3	0.9	6	5 5/16	135	3	75	6 1/8	155	
CB9L-A2	12	9	90	90	4.8	2.2	20.3	0.9	2	5 5/16	135	3	75	5 1/2	139	
CB9L-B	12	9	90	90	4.8	2.2	20.3	0.9	6	5 5/16	135	3	75	5 1/2	139	
CB10A-A2	12	11	140	140	6.2	2.8	27.0	1.1	8	5 5/16	135	3 9/16	90	6 1/8	155	
CB10L-A2	12	11	140	140	6.2	2.8	27.0	1.1	8	5 5/16	135	3 9/16	90	5 3/4	145	
CB10L-B	12	11	140	140	6.2	2.8	27.0	1.1	6	5 5/16	135	3 9/16	90	5 3/4	145	
CB10L-B2	12	11	140	140	6.2	2.8	27.0	1.1	8	5 5/16	135	3 9/16	90	5 3/4	145	
CB12A-A†	12	12	135	135	7.0	3.2	27.0	1.2	6	5 5/16	134	3 3/16	80	6 5/16	160	
CB12AL-A	12	12	135	135	7.0	3.2	25.4	1.2	6	5 5/16	134	3 3/16	80	5 5/16	160	
CB12AL-A2	12	12	135	135	7.0	3.2	25.4	1.2	8	5 5/16	134	3 3/16	80	6 5/16	160	
CB12A-B	12	12	135	135	7.0	3.2	25.4	1.2	6	5 5/16	134	3 3/16	80	6 5/16	160	
CB12B-B2	12	13	145	145	7.5	3.4	27.0	1.2	8	6 5/16	160	3 9/16	90	5 1/8	130	
CB12C-A	12	13	135	135	7.1	3.2	27.0	1.2	4	5 5/16	134	3 3/16	80	6 7/8	175	
CB14-A2	12	14	160	160	7.7	3.5	30.4	1.4	8	5 5/16	134	3 1/2	89	6 9/16	166	
CB14A-A	12	14	160	160	7.8	3.5	30.4	1.4	6	5 5/16	134	3 1/2	89	6 15/16	176	
CB14A-A2	12	14	160	160	7.8	3.5	30.4	1.4	8	5 5/16	134	3 1/2	89	6 15/16	176	
CB14-B2	12	14	160	160	7.7	3.5	30.4	1.4	8	5 5/16	134	3 1/2	89	6 9/16	166	
CB14L-A1	12	14	160	160	7.7	3.5	30.4	1.4	1	5 5/16	134	3 1/2	89	6 9/16	166	
CB14L-A2	12	14	160	160	7.7	3.5	30.4	1.4	8	5 5/16	134	3 1/2	89	6 9/16	166	
CB14L-B2	12	14	160	160	7.7	3.5	30.4	1.4	8	5 5/16	134	3 1/2	89	6 9/16	166	
SCB14L-A2◊	12	14	160	160	7.7	3.5	30.4	1.4	8	5 5/16	134	3 1/2	89	6 9/16	166	
SCB14L-B2◊	12	14	160	160	7.7	3.5	30.4	1.4	8	5 5/16	134	3 1/2	89	6 9/16	166	
CB16-B	12	19	230	230	10.6	4.8	40.6	1.9	6	6 7/8	175	4	100	6 1/8	155	
CB16B-A	12	16	180	180	8.2	3.7	33.8	1.6	4	6 5/16	160	3 9/16	90	6 3/8	161	
CB16B-A1	12	16	180	180	8.2	3.7	33.8	1.6	7	6 5/16	160	3 9/16	90	6 3/8	161	
CB16AL-A2	12	16	190	190	8.7	3.9	37.2	1.6	2	8 1/8	207	2 13/16	71.5	6 7/16	164	
CB16CL-B	12	19	230	230	10.8	4.9	40.6	1.9	5	6 7/8	175	4	100	6 7/8	175	
CB16L-B†	12	19	230	230	10.6	4.8	40.6	1.9	6	6 7/8	175	4	100	6 1/8	155	
HCB16A-AB	12	16	140	140	8.4	3.8	30.4	1.6	7	6	151	3 5/8	91	7 1/16	180	
CB18-A	12	18	190	190	9.3	4.2	40.6	1.8	7	7 1/8	180	3 9/16	90	6 3/8	162	
CB18L-A	12	18	190	190	9.3	4.2	40.6	1.8	7	7 1/8	180	3 9/16	90	6 3/8	162	
C50-N18A-A	12	20	220	220	10.4	4.7	50.7	2.0	7	8 1/8	205	3 9/16	90	6 15/16	176	
C50-N18L-A3	12	20	220	220	10.4	4.7	47.3	2.0	4	8 1/8	205	3 9/16	90	6 3/8	162	
SC50-N18L-AT◊	12	20	220	220	10.4	4.7	47.3	2.0	7	8 1/8	205	3 9/16	90	6 3/8	162	
C60-N24L-A	12	28	280	280	13.1	5.9	57.5	2.8	3	7 1/4	184	4 7/8	124	6 7/8	175	
C60-N24L-B	12	28	280	280	13.1	5.9	57.5	2.8	3	7 1/4	184	4 7/8	124	6 7/8	175	
CB30L-B	12	30	300	300	15.8	7.2	57.5	3.0	4	6 5/8	168	5 3/16	132	6 15/16	176	
CB30CL-B	12	30	300	300	15.9	7.2	57.5	3.0	4	6 5/8	168	5 3/16	132	7 9/16	192	
51814*	12	19	150	150	11.0	5.0	33.8	1.3	10	7 7/16	186	3 1/4	82	6 7/8	171	
51913*	12	19	150	150	11.0	5.0	33.8	1.9	10	7 7/16	186	3 1/4	82	6 7/8	171	
53030*	12	30	280	280	13.2	6.0	54.1	3.0	10	7 7/16	186	5 1/8	130	6 7/8	171	

\* @20hr rate ◊ This battery includes a sensor † Sensor available for this battery

## FURTHER INFORMATION

Please refer to our website [www.power-sonic.com](http://www.power-sonic.com) for product catalogs, safety data sheets (SDS), ISO certification, etc.




# LOCALLY ACTIVATED AGM

SUPER SPORT AGM delivers excellent power and dependable lifespan, helping you go the distance in even the harshest weather conditions. The battery is 100% maintenance free, only needing filling up initially to get you started. Utilizing advanced AGM technology, the battery is ideal for a wide range of powersport applications matching OE specifications.

**BENEFITS:**

- Superior starting power
- Extended cycle life
- Vibration and impact resistant
- Acid pack included for initial filling
- 100% maintenance free after initial filling
- Long shelf life, with no need to recharge before initial acid filling
- Completely sealed and spill proof after initial filling
- Suitable for all weather conditions
- Wide range of sizes covering most applications
- Matches OE specifications

10



MOTORCYCLE

SCOOTER

ATV

PERSONAL WATERCRAFT

SNOWMOBILE

UTV







## SEALED MAINTENANCE FREE (AGM) SPECIFICATIONS

Model	Voltage	Capacity at 10HR	CCA @ 0°F	Approx. Weight w/o Acid		Acid Volume	Regular Charge Current	Terminal	Dimensions: inch (mm)						Assembly Figure (per cover polarity)
	V	Ah	-18°C	lbs.	kgs.	oz.	Ah	(See page 19)	Length		Width		Height		
									inch	mm	inch	mm	inch	mm	
<b>PTX4A-BS</b>	12	2.3	30	2.2	1.0	4.7	0.3	12	4 1/2	114	1 15/16	49	3 3/8	86	
<b>PTX4B-BS</b>	12	2.3	30	2.0	0.9	4.1	0.3	13	4 1/2	114	1 9/16	39	3 7/16	86.5	
<b>PTX4L-BS</b>	12	3	40	3.1	1.4	6.1	0.4	5	4 1/2	114	2 13/16	71	3 3/8	86	
<b>PTX5L-BS</b>	12	4	55	3.8	1.7	8.1	0.5	5	4 1/2	114	2 13/16	71	4 3/16	106	
<b>PT6.5L-BS</b>	12	6.5	60	4.3	2.0	12.8	0.65	5	5 1/2	139	2 5/8	66	4	102	
<b>PTX7A-BS</b>	12	6	85	4.9	2.2	11.2	0.7	5	6	150	3 7/16	87	3 3/4	94	
<b>PTX7L-BS</b>	12	6	75	4.5	2.0	11.2	0.6	5	4 1/2	114	2 13/16	71	5 3/16	131	
<b>PT9A-BS</b>	12	9	90	6.0	2.7	18.9	0.9	6	5 5/16	135	3	76	5 1/2	140	
<b>PTX9-BS</b>	12	8	120	6.3	2.9	13.5	0.9	11	6	150	3 7/16	87	4 3/16	105	
<b>PTX9-BS</b>	12	8	90	5.9	2.7	13.5	0.9	5	6	150	3 7/16	87	4 3/16	105	
<b>PTX12-BS</b>	12	10	160	7.7	3.5	20.3	1.2	5	6	150	3 7/16	87	5 1/8	130	
<b>PTX12A-BS</b>	12	10	120	6.7	3.0	15.9	1.0	11	6	150	3 7/16	87	4 3/16	105	
<b>PTX14-BS</b>	12	12	180	9.1	4.1	23.3	1.4	4	6	150	3 7/16	87	5 3/4	145	
<b>PTX14AH-BS</b>	12	12	160	9.1	4.1	22.3	1.4	4	5 5/16	135	3 9/16	90	6 3/8	161	
<b>PTX14AHL-BS</b>	12	12	160	9.1	4.1	22.3	1.4	4	5 5/16	135	3 9/16	90	6 3/8	161	
<b>PTX14L-BS</b>	12	12	180	9.1	4.1	23.3	1.4	4	6	150	3 7/16	87	5 3/4	145	
<b>PTX15L-BS</b>	12	13	180	10.5	4.8	23.3	1.3	4	6 7/8	175	3 7/16	87	5 1/8	130	
<b>PTX16-BS</b>	12	14	200	10.8	4.9	26.4	1.4	4	6	150	3 7/16	87	6 3/8	161	
<b>PTX16-BS-1</b>	12	14	200	10.8	4.9	26.4	1.4	1	6	150	3 7/16	87	6 3/8	161	
<b>PTX19-BS</b>	12	19	190	14.3	6.5	32.5	1.2	6	6 7/8	175	4	101	6 1/8	157	
<b>PTX19L-BS</b>	12	19	190	14.3	6.5	32.5	1.2	6	6 7/8	175	4	101	6 1/8	157	
<b>PTX19CL-BS</b>	12	21	210	16.5	7.5	32.5	1.2	5	6 7/8	175	4	101	6 7/8	175	
<b>PTX20CH-BS</b>	12	18	220	11.6	5.3	27.7	1.8	4	6	150	3 7/16	87	6 3/8	161	
<b>PTX20-BS</b>	12	18	210	12.7	5.8	31.4	1.8	4	6 7/8	175	3 7/16	87	6 1/8	155	
<b>PTX20L-BS</b>	12	18	210	12.7	5.8	31.4	1.8	4	6 7/8	175	3 7/16	87	6 1/8	155	
<b>PIX30L-BS</b>	12	28	280	18.9	8.6	55.5	2.8	5	6 9/16	166	5	126	6 7/8	175	
<b>PIX30CL-BS</b>	12	30	280	18.9	8.6	55.5	2.8	5	6 9/16	166	5	126	7 5/8	194	
<b>PIX50-BS</b>	12	21	240	15.6	7.1	33.5	2.1	4	8 1/8	205	3 7/16	86	6 7/8	161	
<b>PIX50L-BS</b>	12	21	240	15.6	7.1	33.5	2.1	4	8 1/8	205	3 7/16	86	6 7/8	161	

### FURTHER INFORMATION

Please refer to our website [www.power-sonic.com](http://www.power-sonic.com) for product catalogs, safety data sheets (SDS), ISO certification, etc.



# AGM READY TO GO

AGM READY TO GO provides superior power and is so convenient that all you need to do is install the battery and you are ready to go! No initial acid filling or ongoing maintenance needed. The battery is highly vibration and impact resistant making it ideal for all-terrain and off road uses. AGM Ready to Go offers exceptional starting power and reliability in all weather conditions.

**BENEFITS:**

- Superior starting power
- Extended cycle life
- Highly vibration and impact resistant
- 100% maintenance free
- Completely sealed and spill proof
- Suitable for all weather conditions
- Wide range of sizes covering most applications
- Matches OE specifications
- Simply install and you are ready to go

12



MOTORCYCLE



SCOOTER



ATV



PERSONAL WATERCRAFT



SNOWMOBILE



UTV







## FACTORY ACTIVATED MAINTENANCE FREE SPECIFICATIONS

Model	Voltage V	Capacity at 10HR Ah	CCA @ 0°F -18°C	CA' @ 32°F 0°C	Approx. Weight w/o Acid lbs. kgs.		Regular Charge Current Ah	Terminal (See page 19)	Dimensions: inch (mm)						Assembly Figure (per cover polarity)
									Length		Width		Height		
									inch	mm	inch	mm	inch	mm	
PTX4LBS-FS	12	3	40	130	3.3	1.5	0.4	5	4 1/2	114	2 13/16	71	3 3/8	86	[Diagram]
PTX5LBS-FS	12	4	65	150	4.4	2.0	0.5	5	4 1/2	114	2 13/16	71	4 3/16	106	[Diagram]
PTZ5S	12	4	50	150	4.2	1.9	0.3	5	4 7/16	113	2.76	70	3.35	85	[Diagram]
PT6B-3	12	6	70	215	5.2	2.4	0.6	11	4 7/16	113	2.76	70	4.625	117	[Diagram]
PT7B-4	12	6	85	230	5.6	2.5	0.6	11	6	150	2 9/16	65	3 11/16	93	[Diagram]
PTX7ABS-FS	12	6	85	175	5.9	2.7	0.7	5	6	150	3 7/16	87	3 3/4	94	[Diagram]
PTX7LBS-FS	12	6	80	130	5.5	2.5	0.6	5	4 1/2	114	2 13/16	71	5 3/16	131	[Diagram]
PTZ7S	12	6	75	210	5.2	2.4	0.6	5	4 7/16	113	2 3/4	70	4 1/8	105	[Diagram]
PTZ8V	12	7	80	215	6	2.7	0.7	5	4 1/2	114	2 13/16	71	5 3/16	131	[Diagram]
PT9B-4	12	8	100	280	6.7	3.0	0.8	11	6	150	2 3/4	70	4 1/8	105	[Diagram]
PTX9BS-FS	12	8	90	215	7.2	3.3	0.9	5	6	150	3 7/16	87	4 3/16	105	[Diagram]
PTZ10S	12	8.5	130	285	7.4	3.4	0.9	11	6	150	3 7/16	87	3 11/16	93	[Diagram]
PT12B-4	12	10.5	115	280	8.4	3.8	1	11	6	150	2 3/4	69	5 1/8	130	[Diagram]
PTX12AABS-FS	12	12	120	230	10	4.5	1.2	6	5 5/16	134	3 3/16	80	6 5/16	160	[Diagram]
PTX12ABS-FS	12	10	120	225	7.5	3.4	1.0	11	6	150	3 7/16	87	4 3/16	105	[Diagram]
PTX12BS-FS	12	10	120	260	9.1	4.1	1.2	5	6	150	3 7/16	87	5 1/8	130	[Diagram]
PTZ12S	12	11	140	340	9.2	4.2	1.1	11	6	150	3 7/16	87	4 3/8	110	[Diagram]
PT14B-4	12	12	135	270	9.7	4.4	1.2	11	6	150	2 3/4	70	5 3/4	145	[Diagram]
PTX14BS-FS	12	12	150	275	10.6	4.8	1.4	4	6	150	3 7/16	87	5 3/4	145	[Diagram]
PTX14AHBS-FS	12	12	160	340	11.4	5.2	1.4	4	5 5/16	135	3 9/16	90	6 3/8	161	[Diagram]
PTX14AHLBS-FS	12	12	160	340	11.4	5.2	1.4	4	5 5/16	135	3 9/16	90	6 3/8	161	[Diagram]
PTZ14S	12	12	140	340	9.2	4.2	1.2	11	6	150	3 7/16	87	4 3/8	110	[Diagram]
PTX15LBS-FS	12	13	180	320	11.1	5.0	1.3	4	6 7/8	175	3 7/16	87	5 1/8	130	[Diagram]
PTZ16H	12	16	240	320	10.7	4.9	1.6	4	6	150	3 7/16	87	5 3/4	145	[Diagram]
PTX19BS-FS	12	19	190	400	14.7	6.7	1.9	6	6 7/8	175	4	101	6 1/8	157	[Diagram]
PTX19LBS-FS	12	19	190	400	14.7	6.7	1.9	6	6 7/8	175	4	101	6 1/8	157	[Diagram]
PTX19CLB-FS	12	21	210	415	17.1	7.8	2.1	5	6 7/8	175	4	101	6 7/8	175	[Diagram]
PTX20BS-FS	12	18	200	405	14.1	6.4	1.8	4	6 7/8	175	3 7/16	87	6 1/8	155	[Diagram]
PTX20LBS-FS	12	18	200	405	14.1	6.4	1.8	4	6 7/8	175	3 7/16	87	6 1/8	155	[Diagram]
PIX30LBS-FS	12	28	280	505	20.3	9.2	2.8	5	6 9/16	166	5	126	6 7/8	175	[Diagram]
PIX30CLBS-FS	12	30	280	505	23.9	10.8	3.0	5	6 9/16	166	5	126	7 5/8	194	[Diagram]
PIX50LBS-FS	12	21	230	400	17.4	7.9	2.1	4	8 1/8	205	3 7/16	86	6 7/8	161	[Diagram]
51913-FS*	12	19	170	325	13.9	6.3	1.9	10	7 7/16	186	3 1/4	82	6 7/8	171	[Diagram]
P11U1LD-FS	12	32	300	495	22.7	10.3	3.2	14	7 3/4	196	5 1/4	131	7 7/16	186	[Diagram]
P26RH-FS	12	40	540	595	32.8	14.9	4.0	16	7 3/4	196	6 1/2	165	7 3/4	197	[Diagram]

\* Maintenance free gel technology \* Cranking value determined by the use of hand held tester. Individual test results may vary.  
 Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged within 6 months of storage,  
 otherwise permanent loss of capacity might occur as a result of sulfation.  
 To prolong shelf life without charging, store batteries at 50° F (10° C) or less.

### FURTHER INFORMATION

Please refer to our website [www.power-sonic.com](http://www.power-sonic.com) for product catalogs, safety data sheets (SDS), ISO certification, etc.



# HIGH PERFORMANCE AGM

POWER SONIC ULTRA SPORT is the perfect choice for any premium powersport vehicle. The battery has been designed to deliver enhanced performance for large engine motorcycles and vehicles that are equipped with power hungry electronics like alarms, audio, heating systems and GPS. It is 100% maintenance free, completely spill proof and ready to use with no initial acid filling.

**BENEFITS:**

- Ideal for premium vehicles with power hungry equipment
- Superior capacity
- Excellent cycle life
- Highly vibration and impact resistant
- 100% maintenance free
- Completely sealed and spill proof
- Suitable for all weather conditions
- Very low self-discharge rate
- Upgrade to OE specifications
- Simply install and you are ready to go



MOTORCYCLE

SCOOTER

ATV

PERSONAL WATERCRAFT

SNOWMOBILE

UTV







## ULTRA SPORT SERIES – HIGH PERFORMANCE FACTORY ACTIVATED MAINTENANCE FREE SPECIFICATIONS

Model	Voltage V	Capacity at 10HR Ah	CCA @ 0°F -18°C	CA <sup>†</sup> @ 32°F 0°C	Approx. Weight w/o Acid lbs. kgs.		Regular Charge Current Ah	Terminal (See page 19)	Dimensions: inch (mm)						Assembly Figure (per cover polarity)
									Length		Width		Height		
									inch	mm	inch	mm	inch	mm	
<b>PTX14LBS-FS</b>	12	12	150	275	10.6	4.8	1.4	16	6	150	3 7/16	87	5 3/4	145	
<b>PTX20HBS-FS</b>	12	20	290	460	14.6	6.6	2.0	15	6 7/8	175	3 7/16	87	6 1/8	155	
<b>PTX20HLBS-FS</b>	12	20	290	460	14.6	6.6	2.0	15	6 7/8	175	3 7/16	87	6 1/8	155	
<b>PIX30HLBS-FS</b>	12	30	400	530	21.6	9.8	3.0	15	6 9/16	166	5	126	6 7/8	175	
<b>PIX32HLBS-FS</b>	12	32	420	560	22.9	10.4	3.2	15	6 9/16	166	5	126	6 7/8	175	

<sup>†</sup> Cranking value determined by the use of hand held tester. Individual test results may vary. Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged within 6 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation. To prolong shelf life without charging, store batteries at 50° F (10° C) or less.



### FURTHER INFORMATION

Please refer to our website [www.power-sonic.com](http://www.power-sonic.com) for product catalogs, safety data sheets (SDS), ISO certification, etc.



# LITHIUM

**POWER SONIC HYPER SPORT** is the ultimate choice for those who demand the very best riding experience. The battery has been designed to be up to four times lighter than AGM reducing the overall weight of your bike, resulting in faster acceleration and maximum performance. With proven lithium iron phosphate technology, the battery has a very low self-discharge making it ideal for starting your engine after long periods of non-use. At the heart of every Hyper Sport battery is an integrated active management system that monitors and reacts to multiple voltage, current and temperature events to maximize performance, battery life and safety.

**BENEFITS:**

- Ultra-lightweight – up to 4 times lighter than lead acid batteries
- Super-fast charging – up to 4 times faster charging than lead acid batteries
- Maximum cycle life – over 2000 cycles
- Multi-position mounting
- 100% maintenance free
- Very low self-discharge – long shelf life
- Super safe with integrated active management systems
- Perfect for seasonal use
- Upgrade to OE specifications
- OE fitment – Simply install and you are ready to go



MOTORCYCLE

SCOOTER

ATV

PERSONAL WATERCRAFT

SNOWMOBILE

UTV







LITHIUM

# HYPER SPORT SERIES

## GO SMARTER

Active intelligent monitoring. At the heart of every Hyper Sport Lithium battery is an integrated management system that monitors and reacts to multiple voltage, current, and temperature events to maximize performance, battery life and safety.

## GO SAFER

Lithium Iron Phosphate (LiFePO4) is the safest type of lithium battery and a ready to go replacement and upgrade from lead acid, AGM or gel.

## GO FASTER

- 4X lighter
- 4X faster charge time

## GO LONGER

- 4X longer life
- 4X the warranty

## GO HYPER SPORT

Simply connect your battery and you are ready to go.

### SPECIFICATIONS

Model	Voltage (V)	Cranking Amps* (A)	Watt-Hour (W/HR)	Approx. Dimensions: inch (mm)						Approx. Weight		Polarity	Equal to Lead Acid Capacity**
				Length		Width		Height		lbs.	kgs.		
				inch	mm	inch	mm	inch	mm				
PAL4LHY	12.8	45	14	4.49	114	2.76	70	3.39	86	1.10	0.5	- +	3Ah - 4Ah
PAL5LHY	12.8	90	38	4.49	114	2.76	70	4.13	105	1.32	0.6	- +	4Ah - 6Ah
PAL7AHY	12.8	125	32	5.87	149	3.43	87	3.70	94	1.54	0.7	+ -	4Ah - 8Ah
PAL7ZSHY	12.8	125	32	4.49	114	2.76	70	4.13	105	1.32	0.6	- +	4Ah - 8Ah
PAL9HY	12.8	150	42	5.87	149	3.43	87	3.70	94	1.98	0.9	+ -	6Ah - 10Ah
PAL12HY	12.8	180	76	5.87	149	3.43	87	3.70	94	2.20	1.0	+ -	7Ah - 12Ah
PAL14HY	12.8	250	64	5.87	149	3.43	87	5.71	145	2.65	1.2	+ -	8Ah - 16Ah
PAL14LHY	12.8	250	64	5.87	149	3.43	87	5.71	145	2.65	1.2	- +	8Ah - 16Ah
PAL14-AHY	12.8	250	64	5.28	134	3.46	88	6.50	165	2.65	1.2	+ -	8Ah - 16Ah
PAL14L-AHY	12.8	250	64	5.28	134	3.46	88	6.50	165	2.65	1.2	- +	8Ah - 16Ah
PAL14ZSHY	12.8	250	64	5.87	149	3.43	87	3.70	94	2.20	1.0	+ -	8Ah - 16Ah
PAL16HY	12.8	270	115	5.87	149	3.43	87	5.71	145	3.30	1.5	+ -	12Ah - 18Ah
PAL20LHY	12.8	375	96	6.89	175	3.43	87	6.10	155	3.75	1.7	- +	16Ah - 24Ah
PAL20LHY-H	12.8	375	96	6.89	175	3.43	87	6.10	155	3.75	1.7	- +	16Ah - 24Ah
PAL50N18L-AHY	12.8	500	128	6.89	175	3.43	87	6.10	155	4.63	2.1	- +	20Ah - 30Ah
PAL30LHY-H	12.8	625	160	6.54	166	5.00	127	6.89	175	5.51	2.5	- +	30Ah - 70Ah

\*Cranking Amps is measured by real discharging (5 seconds at 25°C), please do not use lead acid battery CA tester to measure lithium battery CA.  
 \*\*Operation temperature: -10°C ~ 55°C (14°F ~ 131°F), if the ambient temperature is lower than 15°C (59°F), the lead acid equivalent should be smaller

### FURTHER INFORMATION

Please refer to our website [www.power-sonic.com](http://www.power-sonic.com) for product catalogs, safety data sheets (SDS), ISO certification, etc.



# POWERPS SONIC

TRUSTED BATTERY SOLUTIONS

# KEEPING YOU IN CHARGE

18





# TERMINAL CONFIGURATIONS

Terminal shapes vary from one battery to another. By identifying the correct replacement battery from the listing in this book, you are assured of the proper terminal configuration.

For custom applications, refer to the following chart to identify terminal shape and corresponding batteries.

TERMINAL TYPE	FRONT	SIDE	TOP	BATTERY TYPE
1				PTX16-BS-1, CB7C-A, CB14L-A1
2				CB9L-A2, CB16AL-A2
3				CB7L-B, C60-N24L-A, C60-N24AL-B, 12N24-3
4				PTX14AHBS-FS, PTX14AHLBS-FS, PTX14BS-FS, PTX15LBS-FS, PTZ16H, PTX20BS-FS, PTX20LBS-FS, PIX50LBS-FS, PTX14AH-BS, PTX14AHL-BS, PTX14-BS, PTX14L-BS, PTX15L-BS, PTX16-BS, PTX20CH-BS, PTX20-BS, PTX20L-BS, PIX50-BS, PIX50L-BS, CB12C-A, CB16B-A, C50-N18L-A3, CB30L-B, CB30CL-B, PAL4HY, PAL5LHY, PAL7AHY, PAL7ZSHY, PAL9HY, PAL12HY, PAL14HY, PAL14LHY, PAL14-AHY, PAL14L-AHY, PAL14ZSHY, PAL16HY, PAL20LHY, PAL50N18L-AHY
5				PTX4LBS-FS, PTX5LBS-FS, PTZ5S, PTX7ABS-FS, PTX7LBS-FS, PTZ7S, PTZ8V, PTX9BS-FS, PTX12BS-FS, PTX19CLBS-FS, PIX30LBS-FS, PIX30CLBS-FS, PTX4L-BS, PTX5L-BS, PT6.5L-BS, PTX7A-BS, PTX7L-BS, PTX9-BS, PTX12-BS, PTX19CL-BS, PIX30L-BS, PIX30CL-BS, CB4L-A, CB4L-B, CB16CL-B
6				PTX12AABS-FS, PTX19BS-FS, PTX19LBS-FS, PTX19-BS, PTX19L-BS, PT9A-BS, CB16-B-LM, CB16HL-A-LM, CB3L-A, CB3L-B, CB5L-B, CB7-A, CB9-B, CB9A-A, CB9L-B, CB10L-B, CB12A-A, CB12AL-A, CB12A-B, CB14A-A, CB16-B, CB16L-B, 6N6-3B, 6N6-3B-1, 6CB8L-B, 6N11-2D, 6N11A-1B, 6N12A-2D, B38-6A, B39-6, B54-6, 12N5-3B, 12N5-4B, 12N5.5-3B, 12N5.5-4A, 12N5.5A-3B, 12N7-4A, 12N7-3B, 12N7D-3B, 12N7-4B, 12N9-3A-1, 12N9-3B, 12N9-4B-1, 12N10-3A, 12N10-3A-1, 12N12A-4A-1
7				C50-N18L-A-LM, CB16B-A1, HCB16A-AB, CB18-A, CB18L-A, C50-N18A-A, SC50-N18L-AT
8				CB10A-A2, CB10L-A2, CB10L-B2, CB12AL-A2, CB12B-B2, CB14A-2, CB14A-A2, CB14B-2, CB14L-A2, CB14L-B2, SCB14L-A2, SCB14L-B2, 12N11-3A-1, 12N14-3A
9				CHD4-12
10				51913-FS, 51814, 51913, 53030
11				PT6B-3, PT7B-4, PT9B-4, PTZ10S, PT12B-4, PTZ12S, PT14B-4, PTZ14S, PTX12ABS-FS, PTR9-BS, PTX12A-BS
12				PTR4A-BS
13				PTX4B-BS
14				P11U1LD-FS, U1(9), U1(9)R
15				PTX20HBS-FS, PTX20HLBS-FS, PIX30HLBS-FS, PIX32HLBS-FS, PAL20LHY-H, PAL30LHY-H
16				PTX14LBS-FS
17				P26RH-FS

## FURTHER INFORMATION

Please refer to our website [www.power-sonic.com](http://www.power-sonic.com) for product catalogs, safety data sheets (SDS), ISO certification, etc.



# BATTERY TYPE

## NUMBER EXPLANATION


The numbers and letters in the top halves of the tables are commonly known used examples of Powersport batteries. Use the numbers in the bottom halves of the table and the designation keys below each to see what the letters & numbers represent.

LITHIUM						
<b>PAL</b>	<b>20</b>	<b>L</b>	<b>A</b>	<b>HY</b>	<b>-</b>	<b>H</b>
<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>-</b>	<b>6</b>
1 Power Sonic active intelligent monitoring lithium	2 Performance classification	3 Polarity location	4 Designates unique battery case size	5 Hyper sport series	6 Designates Harley Davidson flush mount	

AGM								
<b>PTX</b>	<b>14</b>	<b>A</b>	<b>H</b>	<b>L</b>	<b>-</b>	<b>BS</b>	<b>-</b>	<b>1</b>
<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>-</b>	<b>6</b>	<b>-</b>	<b>7</b>
1 High performance AGM (PTX, PIX, PTZ)	2 Performance classification	3 Designates unique battery case size	4 Designates higher CCA	5 Polarity location	6 Bottle supplied electrolyte	7 Designates unique terminal		

HIGH PERFORMANCE CONVENTIONAL				
<b>CB</b>	<b>16A</b>	<b>L</b>	<b>-</b>	<b>A2</b>
<b>1</b>	<b>2</b>	<b>3</b>	<b>-</b>	<b>4</b>
1 High performance conventional battery	2 Size of the battery case	3 Polarity location	4 Terminal & Exhaust location	

CONVENTIONAL							
<b>12</b>	<b>N</b>	<b>12A</b>	<b>-</b>	<b>4</b>	<b>A</b>	<b>-</b>	<b>1</b>
<b>1</b>	<b>2</b>	<b>3</b>	<b>-</b>	<b>4</b>	<b>5</b>	<b>-</b>	<b>6</b>
1 Normal voltage	2 Conventional battery	3 Size of battery case	4 Polarity location	5 Exhaust location	6 Designates unique terminal		

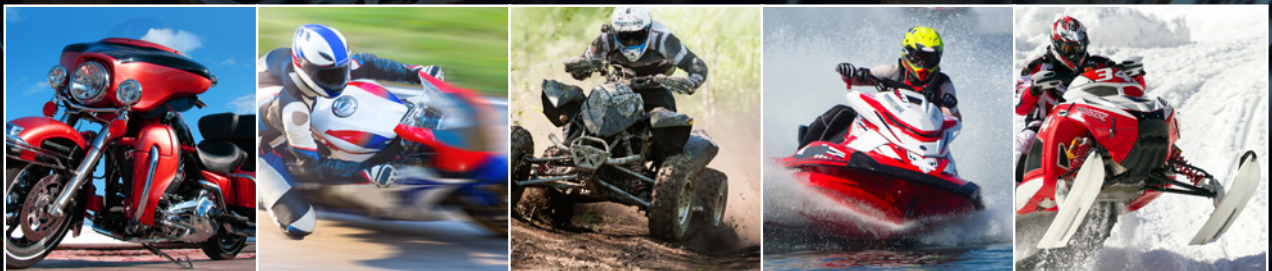



# BATTERY UPGRADE REFERENCE CHART

LITHIUM	HIGH PERFORMANCE AGM	AGM READY TO GO	LOCALLY ACTIVATED AGM UPGRADE	LOCALLY ACTIVATED AGM	LOW MAINTENANCE CONVENTIONAL	HIGH PERFORMANCE CONVENTIONAL	CONVENTIONAL
PAL4HY	-	PTX4LBS-FS	-	PTX4L-BS	-	CB4L-A	-
PAL4HY	-	PTX4LBS-FS	-	PTX4L-BS	-	CB4L-B	-
-	-	-	-	-	-	CB5L-B	12N5-3B
PAL5LHY	-	PTX5LBS-FS	-	PTX5L-BS	-	-	-
-	-	-	-	-	-	CB7L-B	12N7-3B
-	-	-	-	-	-	CB7-A	12N7-4A
PAL7ZSHY	-	-	-	-	-	CB7C-A	-
PAL7AHY	-	PTX7ABS-FS	-	PTX7A-BS	-	-	-
PAL7ZSHY	-	PTX7LBS-FS	-	PTX7L-BS	-	-	-
PAL7ZSHY	-	PTZ7S	-	-	-	-	-
-	-	-	-	PT9A-BS	-	CB9-B	12N9-4B-1
-	-	-	-	-	-	CB9L-B	12N9-3B
-	-	-	-	-	-	CB9L-A2	12N9-3A-1
PAL9HY	-	PTX9BS-FS	-	PTX9-BS	-	-	-
PAL14-AHY	-	-	-	-	-	CB10A-A2	-
-	-	PTX12AABS-FS	-	-	-	CB12A-A	12N12A-4A-1
PAL12HY	-	PTX12ABS-FS	-	PTX12A-BS	-	-	-
PAL14ZSHY	-	PTX12BS-FS	-	PTX12-BS	-	-	-
PAL12HY	-	PTZ10S	-	-	-	-	-
PAL14ZSHY	-	PTZ12S	-	-	-	-	-
PAL14ZSHY	-	PTZ14S	-	-	-	-	-
PAL14-AHY	-	PTX14AHBS-FS	-	PTX14AH-BS	-	CB14-A2	-
PAL14-AHY	-	PTX14AHBS-FS	-	PTX14AH-BS	-	CB14-B2	-
PAL14-AHY	-	PTX14AHBS-FS	-	PTX14AH-BS	-	CB14A-A	-
PAL14-AHY	-	PTX14AHBS-FS	-	PTX14AH-BS	-	CB14A-A2	-
PAL14L-AHY	-	PTX14AHLBS-FS	-	PTX14AHL-BS	-	CB14L-A2	12N14-3A
PAL14L-AHY	-	PTX14AHLBS-FS	-	PTX14AHL-BS	-	CB14L-B2	-
PAL14L-AHY	-	PTX14AHLBS-FS†	-	PTX14AHL-BS†	-	SCB14L-A2	-
PAL14L-AHY	-	PTX14AHLBS-FS†	-	PTX14AHL-BS†	-	SCB14L-B2	-
PAL14L-AHY	-	-	-	-	-	CB14L-A1	-
PAL14HY	PTZ16H	PTX14BS-FS	-	PTX14-BS	-	-	-
PAL14LHY	-	PTX14LBS-FS	-	PTX14L-BS	-	-	-
-	-	PTX15LBS-FS	-	PTX15L-BS	-	-	-
PAL16HY	-	-	PTX20CH-BS	PTX16-BS	-	-	-
-	-	PTX19BS-FS	-	PTX19-BS	CB16-B-LM	CB16-B	-
-	-	PTX19LBS-FS	-	PTX19L-BS	CB16HL-A-LM	-	-
-	-	PTX19CLBS-FS	-	PTX19CL-BS	-	CB16CL-B	-
-	-	PTX19LBS-FS	-	PTX19L-BS	-	CB16L-B	-
-	PTX20HBS-FS*	PTX20BS-FS*	-	PTX20-BS*	-	CB18-A	-
PAL20LHY	PTX20HLBS-FS*	PTX20LBS-FS*	-	PTX20L-BS*	-	CB18L-A	-
-	-	-	-	PIX50-BS	-	C50-N18A-A	-
PAL50N18L-AHY	-	PIX50LBS-FS#	-	PIX50L-BS#	C50-N18L-A-LM#	C50-N18L-A3	-
PAL50N18L-AHY	-	PIX50LBS-FS#†	-	PIX50L-BS#†	-	SC50-N18L-AT	-
PAL30LHY-H	PIX30HLBS-FS/ PIX32HLBS-FS	PIX30LBS-FS	-	PIX30L-BS	-	CB30L-B	-
PAL30LHY-H	-	PIX30CLBS-FS	-	PIX30CL-BS	-	CB30CL-B	-
-	PIX30HLBS-FS/ PIX32HLBS-FS	PIX30LBS-FS	-	PIX30L-BS	-	C60-N24L-B	-
-	-	51913-FS	-	-	-	51913	-
PAL30LHY-H	PIX30HLBS-FS/ PIX32HLBS-FS	PIX30LBS-FS	-	PIX30L-BS	-	53030	-

† Eliminates need for sensor (needs to be disabled).

\* The PTX20 series batteries may be used as an optional upgrade, but some modification to the hold down may be necessary. See battery label for retrofit cautions.

# Top and front terminal mounts only.

≠ Top and side terminal mounts only.

## FURTHER INFORMATION

Please refer to our website [www.power-sonic.com](http://www.power-sonic.com) for product catalogs, safety data sheets (SDS), ISO certification, etc.





## GLOBAL HEADQUARTERS

(USA AND INTERNATIONAL EXCLUDING EMEA)

Power-Sonic Corporation

365 Cabela Dr Suite 300,

Reno, Nevada 89523

USA

T: +1 619 661 2020

E: [customer-service@power-sonic.com](mailto:customer-service@power-sonic.com)

## POWER-SONIC EMEA

(EMEA – EUROPE, MIDDLE EAST AND AFRICA)

Smitspol 4, 3861 RS Nijkerk,

The Netherlands

T NL: + 31 33 7410 700

T UK: + 44 1268 560 686

T FR: + 33 344 32 18 17

E: [salesEMEA@power-sonic.com](mailto:salesEMEA@power-sonic.com)



## KEEPING YOU IN CHARGE

Power Sonic is dedicated to continual product development enabling us to offer solutions for all industry specifications globally. We pride ourselves on product quality, performance and reliability, meeting the industry standards and approvals.

To ensure safe and efficient operation always refer to the latest edition of our Technical Manual, as published on our website.  
© 2019, Power-Sonic Corporation. All rights reserved. All trademarks are the property of their respective owners.  
All data subject to change without notice. E&O.E