



## EVAC-7i (NA) Specifications

Accelerating mass adoption of electric vehicles by delivering sustainable EV charging solutions that can be deployed anywhere



## EVAC-7i (NA)

7.68kW AC Level 2 Charger


## **FEATURES**

- Designed for easy installation and maintenance
- Commercial grade EV charging station
- RFID card reader
- SAE J1772 Type 1 connector
- 4G and Wi-Fi network connections
- NEMA 4 rated design ideal for outdoor installation
- Wall-mounted or floor mounted with a pedestal
- Local load management
- OCPP 1.6J compliant



## **DIMENSIONS INCH**

SPECIFICATIONS	
Connector Type	SAE J1772 Type 1
Output Power	7.68 kW
Output AC Current	32 A (single phase)
Supply Input	208 / 240 VAC single phase (+/-10%)
Supply Frequency	60 Hz
Wiring Type	Hardwired
Network Connection	4G (LTE Cat.1), Wi-Fi (802.11 b/g/n
Communication Protocol	OCPP1.6J
Operating Temperature	-22°F (-30°C) to 122°F (50°C)
Display	Dot-matrix (2 lines)
IP Rating	NEMA 4
IK Rating	IK10
Standards	UL 2231/2594, FCC Part 15B
Mounting	Wall or floor mounted using a pedestal
RFID	ISO 14443 A/B, ISO 15693
Metering Accuracy	Embedded, ± 1%
Charging Cable	Tethered 25 ft type 1

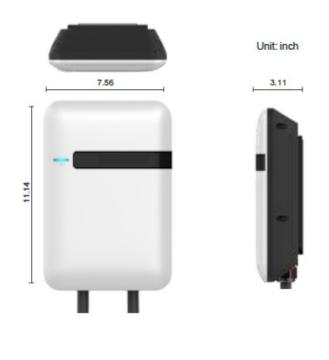



EVESCO
(PART OF POWER SONIC CORP.)
NA, LATAM & APAC
365 Cabela Dr Suite 300,
Reno, Nevada 89439
USA

T: +1 775 824 6500

EMEA
Smitspol 4, 3861 RS,
Nijkerk
The Netherlands
T: +31 33 7410 700