



Solar

Wind

Mobility

Golf Carts




## DCG12-26

12V 24.4 AH @ 20-hr.  
12V 22.3 AH @ 10-hr.

Rechargeable Sealed Lead Acid Battery  
DCG Series – Deep Cycle Gel

### TERMINALS: (mm)


**T12:** Threaded insert with  
5mm stud fastener



Torque: 2.0~3.0 Nxm

T12 Stocked in EU (Contact us for other terminal types)

### DIMENSIONS: inch (mm)





**L:** 6.54 (166)

**W:** 6.89 (175)

**H:** 4.92 (125)

**TH:** 4.92 (125)

Tolerances are +/- 0.04 in.  
(+/- 1mm) and +/- 0.08 in.  
(+/- 2mm) for height  
dimensions. All data subject  
to change without notice.



## FEATURES

- Thixotropic gel electrolyte technology for superior performance
- Valve regulated, maintenance-free spill proof construction
- Power/volume ratio yielding excellent energy density
- Superb deep cycle performance and longevity in deep discharge conditions
- Rugged vibration and impact resistant ABS case and cover (UL 94-HB)

## APPROVALS

- Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified
- UL 1989 Standard for Standby Batteries
- ISO9001:2015–Quality Management Systems
- IEC 60896-21/22 Stationary Lead-Acid Batteries
- EU 2023/1542 Compliant: European Battery Regulation

## PERFORMANCE SPECIFICATIONS

<b>Nominal Voltage</b>		12 volts (6 cells)
<b>Nominal Capacity</b>		
20-hr.	(1.22A to 10.50 volts)	24.40 AH
10-hr.	(2.23A to 10.50 volts)	22.30 AH
5-hr.	(4.17A to 9.60 volts)	20.85 AH
1-hr.	(14.0A to 9.60 volts)	14.00 AH
<b>Approximate Weight</b>		18.74 lbs. (8.5 kg)
<b>Internal Resistance (approx.)</b>		20 milliohms
<b>Shelf Life</b> (% of nominal capacity at 68°F (20°C))		
1 Month		97%
3 Month		91%
6 Month		83%
<b>Operating Temperature Range</b>		
Charge		-4°F (-20°C) to 104°F (40°C)
Discharge		-5°F (-15°C) to 122°F (50°C)
<b>Case</b>		ABS Plastic Rated to UL 94 H-B
<b>Recommended Power Sonic Chargers</b>		PSC-122000ACX

### GLOBAL HEADQUARTERS (USA AND INTERNATIONAL EXCLUDING EMEA)

The Power-Sonic Corporation

365 Cabela Dr Suite 300,  
Reno, Nevada 89523  
USA

T: +1 619 661 2020

E: customer-service@power-sonic.com

### POWER-SONIC EMEA

(EMEA – EUROPE, MIDDLE EAST AND AFRICA)

Power-Sonic EMEA

Smitspol 4, 3861 RS, Nijkerk, Netherlands

T NL: +31 33 7410 700

T UK: +44 1268 560 686


T FR: +33 344 32 18 17

E: salesEMEA@power-sonic.com

## DCG12-26 12V 24.4 AH @ 20-hr. 12V 22.3 AH @ 10-hr.

Rechargeable Sealed Lead Acid Battery  
DCG Series – Deep Cycle Gel

### CYCLE LIFE IN RELATION TO DEPTH OF DISCHARGE

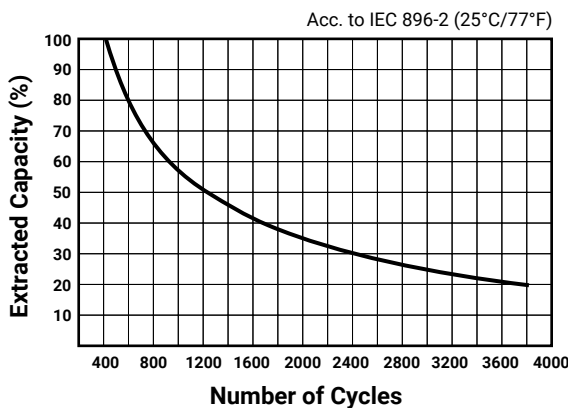

### CHARGING

**Cycle Applications:** Apply constant voltage charge at 2.35VPC to 2.45VPC (14.1 to 14.7 volts for 12V Monobloc) at 20°C. The initial charging current should be set at less than C/5 Amps. Switch to float charge when the current falls to a 3% capacity rate to avoid overcharging.

**Stand-By or "Float" Service:** Apply constant voltage charge of 2.25VPC to 2.30VPC (13.5 to 13.8 volts for 12V Monobloc) at 20°C. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition.

**Temperature Compensation:** Charging voltage for both cyclic and stand-by applications should be regulated in relation to ambient temperature. As temperature rises, charging voltage should be reduced to prevent overcharge and increased as the temperature falls to avoid undercharge.

For further charging information, including temperature compensation factors, see the Power-Sonic Technical Manual.

### APPLICATIONS

A whole range of CYCLIC applications including but not limited to:

- Solar
- Wind
- Mobility
- Golf Carts


#### GLOBAL HEADQUARTERS (USA AND INTERNATIONAL EXCLUDING EMEA)

The Power-Sonic Corporation  
365 Cabela Dr Suite 300,  
Reno, Nevada 89523  
USA  
T: +1 619 661 2020  
E: customer-service@power-sonic.com

#### POWER-SONIC EMEA (EMEA – EUROPE, MIDDLE EAST AND AFRICA)

Power-Sonic EMEA  
Smitspol 4, 3861 RS, Nijkerk, Netherlands  
T NL: +31 33 7410 700  
T UK: +44 1268 560 686  
T FR: +33 344 32 18 17  
E: salesEMEA@power-sonic.com

### GENERAL RELATION OF CAPACITY VS. STORAGE TIME

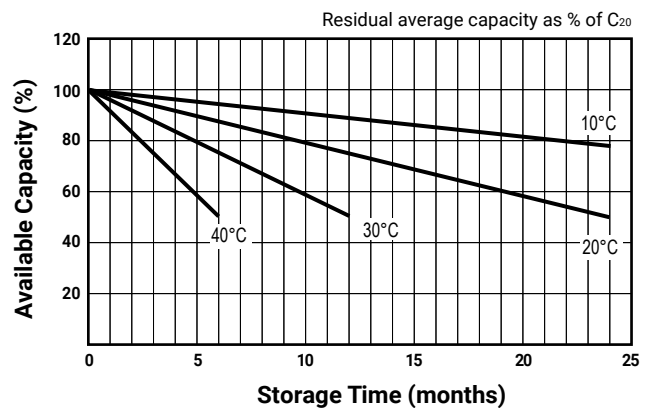

### CHARGERS

Power Sonic offers a wide range of chargers suitable for batteries with a variety of capacities.

Please refer to our website for more information on our switch mode and transformer type chargers.

Please contact our technical department for advice if you have difficulty in locating a suitable charger.

### FURTHER INFORMATION

Please refer to our website for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certification, etc.

