

DCG12-110

Gel VRLA

DCG Series - Deep Cycle Gel



Performance Specs

Nominal Voltage 12.0 Volts, (6.0 cells)

Nominal Capacity

20-hr. (5.5A to 10.8 Volts)	110.0Ah
-----------------------------	---------

10-hr. (10.5A to 10.8 Volts)	105.0Ah
------------------------------	---------

5-hr. (19.1A to 10.2 Volts)	95.5Ah
-----------------------------	--------

1-hr. (66.5A to 9.6 Volts) 66.5Ah

Approximate Weight	76.06lbs, (34.5kg)
---------------------------	--------------------

Dimensions **L:** 16.06in, 408.0mm

W: 6.97in, 177.0mm

H: 8.86in, 225.0mm

TH: 8.86in, 225.0mm

Internal Resistance (approx.) mΩ	7.0mΩ
----------------------------------	-------

Max Short Circuit Discharge Current	1980.0A
-------------------------------------	---------

Operating Temperature

Range

Charge -4°F (-20°C) to 104°F (40°C)

Discharge -4°F (-20°C) to 140°F (60°C)

Case ABS (UL94 HB or V-0 optional)



Recommended Power-Sonic Charger PSC-1212000ACX

Configuration Options

- DCG12-110 M8

Available Terminals (mm)

**T11 THREADED INSERT
- 8mm STUD**




Graphs

Capacity Retention SLA




PDC Cycle Life

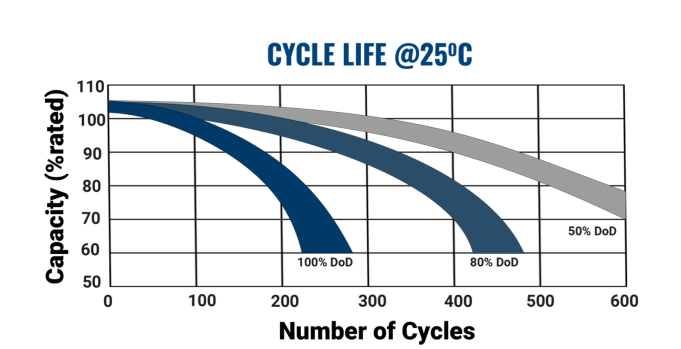

SLA Charging



SLA Discharge Rates

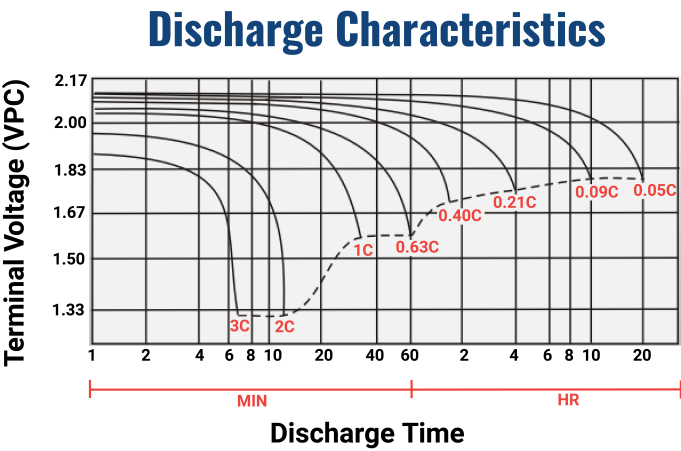

Constant Current

VoltageOverTime	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V/cell	213.5	163.8	138.0	105.6	79.5	66.5	48.0	38.8	29.4	23.2	19.8	17.2	13.4	11.1	5.97
1.65V/cell	192.4	150.3	128.4	100.3	76.6	65.1	47.6	38.4	29.0	22.9	19.6	17.0	13.3	11.02	5.94
1.67V/cell	191.4	149.5	127.5	99.6	75.8	64.4	47.0	38.3	28.9	22.8	19.5	16.9	13.2	11.0	5.93
1.70V/cell	182.0	143.8	123.2	96.9	74.3	63.3	46.1	37.5	28.5	22.4	19.1	16.6	13.1	10.9	5.85
1.75V/cell	166.6	133.8	115.9	92.6	71.7	61.2	44.4	36.0	27.7	22.1	18.6	16.4	12.9	10.8	5.73
1.80V/cell	150.8	123.5	108.3	88.5	69.0	54.6	40.6	33.6	26.6	21.4	18.0	15.8	12.7	10.5	5.5
1.85V/cell	123.2	102.5	91.3	76.3	60.9	49.4	36.8	30.5	24.2	19.7	17.1	15.0	12.1	10.3	5.32


Constant Power

VoltageOverTime	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V/cell	362.8	286.4	246.8	191.7	147.3	124.7	90.6	73.6	56.2	44.4	38.3	33.0	26.0	21.7	11.8
1.65V/cell	335.1	267.7	232.8	184.5	142.8	122.6	89.4	72.9	55.6	44.2	38.0	32.9	25.9	21.64	11.72
1.67V/cell	333.9	266.9	231.8	183.6	141.8	122.0	89.2	72.8	55.4	44.1	37.9	32.8	25.8	21.6	11.7
1.70V/cell	321.1	258.9	225.6	179.6	139.8	120.6	88.1	71.9	55.1	43.5	37.2	32.5	25.7	21.5	11.6
1.75V/cell	299.3	244.4	214.5	173.5	135.9	117.3	85.6	69.7	53.8	43.0	36.4	32.1	25.3	21.3	11.4
1.80V/cell	275.6	228.9	202.8	167.5	131.9	105.4	78.7	65.3	51.9	41.9	35.4	31.1	25.0	20.7	10.9
1.85V/cell	229.2	192.7	173.0	145.6	117.2	95.9	71.7	59.6	47.5	38.7	33.7	29.5	24.0	20.4	10.6

Charging

Cycle Applications: Apply constant voltage charge at 2.35VPC – 2.45VPC (14.1 to 14.7 volts for 12V Monobloc) at 20°C. The initial charging current should be set at less than C/5 Amps. Switch to float charge when the current falls to a 3% capacity rate to avoid overcharging. **Stand-By or "Float" Service:** Apply constant voltage charge of 2.25VPC – 2.30VPC (13.5 to 13.8 volts for 12V Monobloc) at 20°C. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition. **Temperature Compensation:** Charging voltage for both cyclic and stand-by applications should be regulated in relation to ambient temperature. As temperature rises, charging voltage should be reduced to prevent overcharge and increased as the temperature falls to avoid undercharge. For further charging information, including temperature compensation factors, see the Power-Sonic Technical Manual.

Engineering Drawing

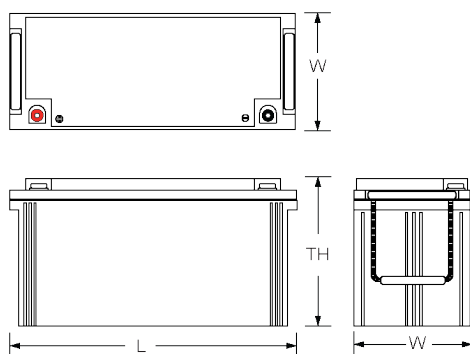

For Further Information

Please refer to our website, www.power-sonic.com, for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certification, etc.

Approvals



ISO 9001:2015 certification ensures consistent quality management and manufacturing standards for energy storage products.



California Proposition 65 compliant, providing consumer safety through reduced chemical exposure in battery manufacturing.



Sealed lead-acid batteries classified UN2800 non-spillable, certified safe for air, sea, and ground transport worldwide.



UL Recognized mark certifies safety-tested components for electrical reliability in battery and energy storage systems.