



PS-12330

General Purpose SLA
PS Series - General Purpose



Versatile sealed lead acid batteries specifically engineered for use in general purpose float and light cyclic applications including fire and security systems, emergency lighting, UPS, toys and medical devices.

Performance Specs

Nominal Voltage	12.0 Volts, (6.0 cells)
Nominal Capacity	
20-hr. 30.3Ah (1.65A to 10.5 Volts)	33.0Ah
10-hr. 30.3Ah (3.03A to 10.5 Volts)	30.3Ah
5-hr. 26.15Ah (5.23A to 10.2 Volts)	26.15Ah
1-hr. 19.1Ah (19.1A to 9.6 Volts)	19.1Ah
Approximate Weight	20.5lbs, (9.3kg)
VDS Weight	lbs, (kg)
Dimensions	L: 7.68in, 195.0mm
+/- 0.08 in. (+/- 2mm) for length, width, and height dimensions	W: 5.12in, 130.0mm
	H: 6.46in, 164.0mm
	TH: 7.01in, 178.0mm
Internal Resistance (approx.) mΩ	14.0mΩ
Max Short Circuit Discharge Current	750.0A
Operating Temperature Range	
Charge	-4°F (-20°C) to 104°F (40°C)
Discharge	5°F (-15°C) to 122°F (50°C)
Case	ABS (UL94 HB or V-0 optional)
Recommended Power-Sonic Charger	PSC-122000ACX


Configuration Options

- PS-12330 F2
- PS-12330 M6
- PS-12330 NB3


Available Terminals (mm)

TERMINAL POSTS

With nut & bolt connectors



Torque: 3.9~5.4 Nxm



Torque: 2.0~3.0 Nxm




Phone (US): (775) 825-6500
Phone (EMEA): +31 33 7410 700
Email (US): Sales@Power-Sonic.com
Email (EMEA): SalesEMEA@Power-Sonic.com
www.power-sonic.com


To ensure safe and efficient operation always refer to the latest edition of our Technical Manual, as published on our website. © 2025, Power-Sonic Corporation. All rights reserved. All trademarks are the property of their respective owners. All data subject to change without notice. E&O.E
Updated 10/24/2025 5:01 AM Version 1.0

Graphs


Capacity Retention SLA

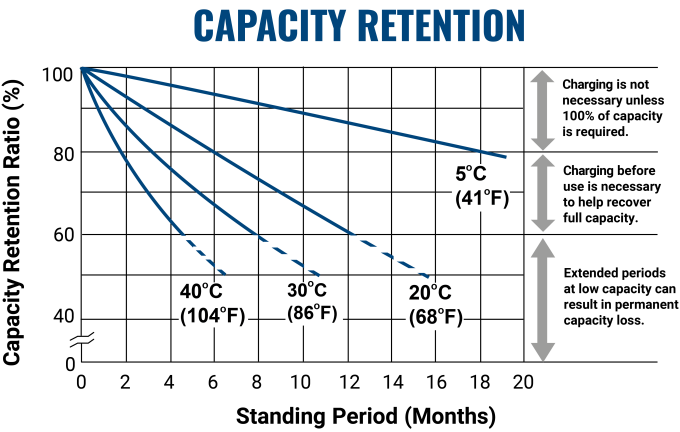


PS Cycle Life

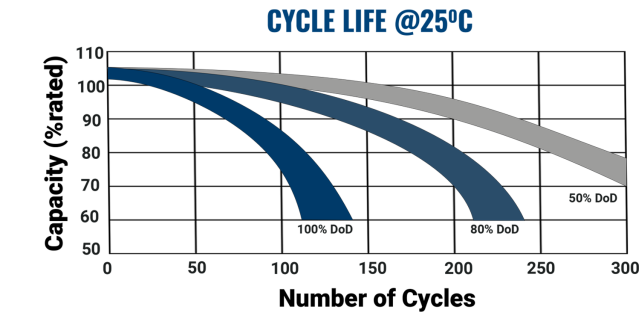

SLA Charging

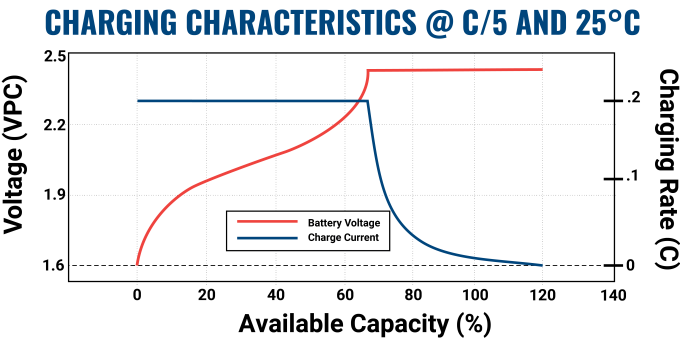

SLA Float Life 5YR

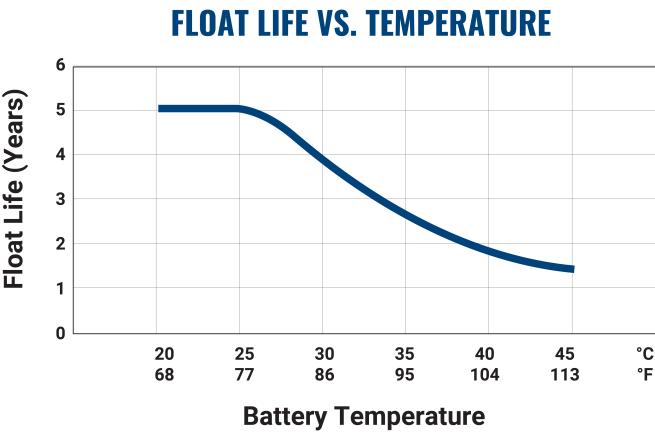

Constant Current

VoltageOverTime	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	84.0	59.3	46.1	39.1	28.8	21.1	17.2	12.7	10.1	7.31	5.87	5.03	4.3	3.39	2.96	1.62
1.80V/cell	90.3	62.8	48.4	40.7	29.7	21.6	17.7	13.0	10.3	7.43	5.95	5.1	4.37	3.44	3.0	1.63
1.75V/cell	95.1	65.3	50.0	41.8	30.5	22.1	18.0	13.2	10.4	7.55	6.03	5.16	4.42	3.48	3.03	1.65
1.70V/cell	99.6	68.0	51.7	43.0	31.2	22.6	18.4	13.5	10.6	7.66	6.11	5.23	4.47	3.51	3.06	1.66
1.67V/cell	103.1	69.9	52.9	43.9	31.8	22.9	18.6	13.6	10.7	7.73	6.17	5.28	4.51	3.54	3.09	1.67
1.65V/cell	104.1	70.5	53.2	44.1	32.0	23.0	18.7	13.7	10.8	7.78	6.23	5.3	4.53	3.55	3.1	1.68
1.60V/cell	109.4	72.8	54.8	45.2	32.7	23.5	19.1	13.9	10.9	7.88	6.28	5.36	4.58	3.59	3.12	1.69

Constant Power


VoltageOverTime	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	158.8	112.8	88.3	75.4	55.7	40.8	33.5	24.8	19.7	14.4	11.6	9.92	8.51	6.72	5.88	3.22
1.80V/cell	169.2	118.7	92.1	78.0	57.2	41.8	34.3	25.3	20.0	14.6	11.7	10.1	8.64	6.81	5.96	3.27
1.75V/cell	176.3	122.6	94.6	79.7	58.4	42.5	34.8	25.7	20.3	14.8	11.8	10.2	8.72	6.88	6.01	3.3
1.70V/cell	182.8	126.7	97.2	81.6	59.6	43.3	35.4	26.0	20.6	15.0	12.0	10.3	8.81	6.95	6.06	3.32
1.67V/cell	187.6	129.5	99.3	83.1	60.5	43.9	35.8	26.3	20.8	15.1	12.1	10.4	8.89	7.0	6.11	3.36
1.65V/cell	189.4	130.7	100.0	83.7	60.9	44.2	36.0	26.4	20.9	15.2	12.1	10.4	8.93	7.02	6.12	3.37
1.60V/cell	195.2	133.3	102.0	85.1	61.8	44.7	36.5	26.8	21.1	15.3	12.3	10.5	8.99	7.09	6.18	3.39



Charging

Cycle Applications: Apply constant voltage charge at 2.35VPC – 2.45VPC (14.1 to 14.7 volts for 12V Monobloc) at 20°C. The initial charging current should be set at less than C/5 Amps. Switch to float charge when the current falls to a 3% capacity rate to avoid overcharging. **Stand-By or "Float" Service:** Apply constant voltage charge of 2.25VPC – 2.30VPC (13.5 to 13.8 volts for 12V Monobloc) at 20°C. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition. **Temperature Compensation:** Charging voltage for both cyclic and stand-by applications should be regulated in relation to ambient temperature. As temperature rises, charging voltage should be reduced to prevent overcharge and increased as the temperature falls to avoid undercharge. For further charging information, including temperature compensation factors, see the Power-Sonic Technical Manual.

Engineering Drawing

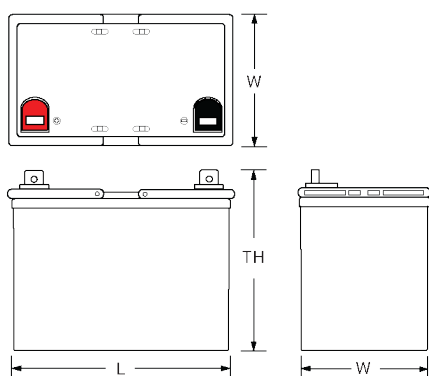

For Further Information

Please refer to our website, www.power-sonic.com, for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certification, etc.

Approvals



CE marking confirms a product meets EU safety, health, and environmental protection standards for battery and energy systems.



Conflict-free mineral certification ensuring ethical sourcing and transparent supply chain for responsible production.



Extended mineral reporting meets global supply chain transparency standards for responsible and ethical sourcing practices.



IEC 60896 standard ensures stationary lead-acid batteries meet safety, performance, and float charge application requirements.



ISO 9001:2015 certification ensures consistent quality management and manufacturing standards for energy storage products.



PFAS-free certification verifying environmentally responsible manufacturing of batteries and energy storage technologies.



California Proposition 65 compliant, providing consumer safety through reduced chemical exposure in battery manufacturing.



REACH compliant with EU chemical safety standards ensuring restricted substances are controlled in all battery components.



RoHS compliance ensures restriction of hazardous substances in electrical, electronic, and battery-powered products.



Sealed lead-acid batteries classified UN2800 non-spillable, certified safe for air, sea, and ground transport worldwide.



SVHC compliant with EU REACH regulations for Substances of Very High Concern used in electrical and energy storage products.



U.S. EPA TSCA compliance ensures toxic substances are regulated for safe manufacturing of batteries and electronic components.



UL 1989 certified for valve-regulated and vented lead-acid batteries used in UPS, emergency, and backup power applications.



VdS certified for tested reliability, quality, and safety of batteries in alarm, security, and backup power systems.



Phone (US): (775) 825-6500
Phone (EMEA): +31 33 7410 700
Email (US): Sales@Power-Sonic.com
Email (EMEA): SalesEMEA@Power-Sonic.com
www.power-sonic.com

To ensure safe and efficient operation always refer to the latest edition of our Technical Manual, as published on our website. © 2025, Power-Sonic Corporation. All rights reserved. All trademarks are the property of their respective owners. All data subject to change without notice. E&O.E

Updated 10/24/2025 5:01 AM

Version 1.0