

PS-6200

Rechargeable Sealed Lead Acid Battery PS - General Purpose Series

Versatile sealed lead acid batteries specifically engineered for use in general purpose float and light cyclic applications including fire and security systems, emergency lighting, UPS, toys and medical devices.




Available Terminals

1


NB2 TERMINAL POSTS

With nut & bolt connectors



Torque: 3.9~5.4 Nxm

Engineering Drawing

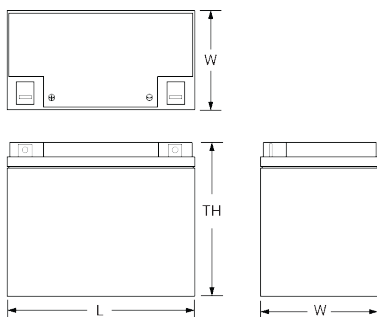

L: 6.18in (157.0mm)

W: 3.27in (83.0mm)

H: 4.92in (125.0mm)

HT: 4.92in (125.0mm)

+/- 0.08 in. (+/- 2mm) for length, width, and height dimensions

Features

- AGM Technology
- Gas Recombination
- Power Volume Ratio
- SLA ABS Case
- SLA Maintenance Free

Performance Specs

Nominal Voltage	6.0V
Nominal Capacity	20.0Ah
20-hr Rate	20.0Ah
10-hr Rate	18.9Ah
5-hr Rate	17.95Ah
1-hr Rate	12.6Ah
Weight	3.3kg
Internal Resistance	9.0 milliohms
Max Discharge Current	300.0A
Charge Temp Range	24°F (?20°C) to 104°F (40°C)
Discharge Temp Range	5°F (?15°C) to 122°F (50°C)
Case Material	ABS (UL94 HB or V-0 optional)

Available options

- PS-6200 NB2

Applications



Emergency
Lighting



Fire Security



General
Purpose



Medical



Signaling
(Air, Rail, Sea)



Solar



Telecomm



UPS



Utility



Wind

Constant Current Discharge Table

VoltageOverTime	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V/cell	76.5	50.3	38.8	29.9	21.3	15.4	12.6	9.41	7.44	5.41	4.34	3.68	3.14	2.47	1.95	1.03
1.65V/cell	72.7	14.6	37.8	29.2	20.8	15.1	12.4	9.29	7.34	5.35	4.29	3.64	3.11	2.44	1.93	1.02
1.67V/cell	72.1	48.2	37.5	29.0	20.7	15.0	12.3	9.22	7.29	5.31	4.27	3.63	3.1	2.43	1.92	1.02
1.70V/cell	69.7	46.9	36.6	28.4	20.3	14.8	12.1	9.1	7.22	5.26	4.23	3.59	3.07	2.41	1.91	1.01
1.75V/cell	66.6	45.1	35.4	27.6	19.8	14.4	11.9	8.95	7.11	5.18	4.17	3.55	3.04	2.39	1.89	1.0
1.80V/cell	63.2	43.4	34.3	26.9	19.3	14.1	11.7	8.78	6.98	5.1	4.11	3.5	3.0	2.36	1.87	0.99
1.85V/cell	58.8	40.9	32.7	25.9	18.8	13.8	11.4	8.61	6.86	5.02	4.06	3.45	2.96	2.33	1.85	0.98


Constant Power Discharge Table

VoltageOverTime	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V/cell	136.6	92.0	72.2	56.2	40.3	29.2	24.1	18.1	14.4	10.5	8.48	7.21	6.18	4.87	3.86	2.05
1.65V/cell	132.6	90.3	71.0	55.4	39.7	28.9	23.8	17.9	14.2	10.4	8.4	7.15	6.12	4.83	3.82	2.04
1.67V/cell	131.3	89.4	70.3	54.9	39.4	28.7	23.7	17.8	14.1	10.4	8.35	7.12	6.1	4.81	3.81	2.03
1.70V/cell	127.9	87.4	68.8	53.9	38.8	28.3	23.4	17.6	14.0	10.3	8.29	7.07	6.05	4.77	3.79	2.02
1.75V/cell	123.4	84.6	67.0	52.7	38.0	27.8	23.0	17.4	13.8	10.1	8.19	6.98	5.99	4.73	3.75	2.0
1.80V/cell	118.4	81.9	65.3	51.5	37.2	27.3	22.6	17.1	13.6	10.0	8.09	6.9	5.93	4.68	3.72	1.98
1.85V/cell	111.1	77.8	62.6	49.8	36.3	26.7	22.2	16.8	13.4	9.86	7.99	6.82	5.85	4.62	3.67	1.96

Graphs


1. Capacity Retention SLA

CAPACITY RETENTION

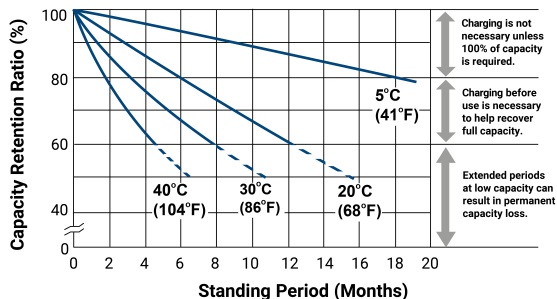


2. PS Cycle Life

CYCLE LIFE @25°C

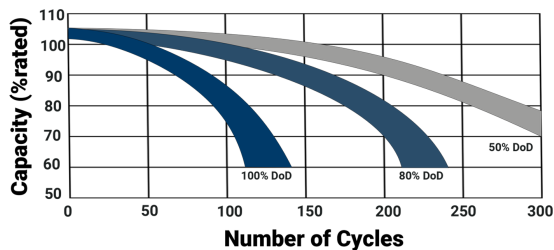


3. SLA Charging

CHARGING CHARACTERISTICS @ C/5 AND 25°C

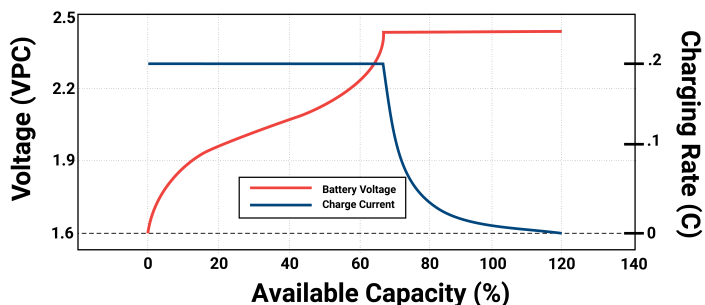

4. SLA Float Life 5YR

FLOAT LIFE VS. TEMPERATURE

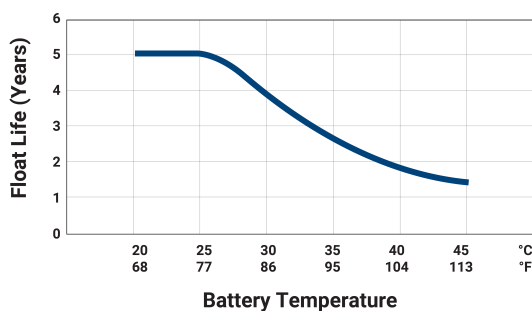

Charging

- Cycle Applications: Apply constant voltage charge at 2.35VPC – 2.45VPC (14.1 to 14.7 volts for 12V Monobloc) at 20°C. The initial charging current should be set at less than C/5 Amps. Switch to float charge when the current falls to a 3% capacity rate to avoid overcharging. Stand-By or "Float" Service: Apply constant voltage charge of 2.25VPC – 2.30VPC (13.5 to 13.8 volts for 12V Monobloc) at 20°C. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition. Temperature Compensation: Charging voltage for both cyclic and stand-by applications should be regulated in relation to ambient temperature. As temperature rises, charging voltage should be reduced to prevent overcharge and increased as the temperature falls to avoid undercharge. For further charging information, including temperature compensation factors, see the Power-Sonic Technical Manual.

Approvals

