

## PSL-CP-24250

### Communications Protocols Lithium PSL-CP - Communications Protocols Lithium



Long cycle life and dependable performance with advanced connectivity. Integrated communications protocols allow seamless communication with external systems, providing real-time data on voltage, current, temperature, and state of charge. With built-in BMS protection these batteries are ideal for energy storage, telecom, UPS, and other applications where system integration and monitoring are critical.


### Performance Specifications

<b>Nominal Voltage</b>	25.6 Volts, (8.0 cells)
<b>Nominal Capacity</b>	25.0Ah
2-hr. (12.5A to 20.0 Volts)	
<b>Stored Energy</b>	640.0Wh
<b>Cycle Life (@100% Depth of Discharge)</b>	2000
<b>Series Connection</b>	No series connections
<b>Parallel Connection</b>	Contact Power-Sonic to connect more than 4 in parallel
<b>Approximate Weight</b>	12.9lbs, (5.85kg)
<b>Dimensions</b>	<b>L:</b> 7.68in, 195.0mm <b>W:</b> 5.12in, 130.0mm <b>H:</b> 7.2in, 183.0mm <b>TH:</b> 7.2in, 183.0mm
<b>Internal Resistance (approx.) mΩ</b>	mΩ
<b>Max Continuous Discharge Current</b>	25.0A
<b>Operating Temperature Range</b>	
Charge	32°F (0°C) to 113°F (45°C)
Discharge	-4°F (-20°C) to 140°F (60°C)
<b>Case</b>	ABS Plastic Rated to UL94:VO
<b>Recommended Power-Sonic Charger</b>	PSLC-2420000

### Configuration Options

- PSL-CP-24250 M6


### Available Terminals (mm)




Torque: 2.0~3.0 Nxm

## Graphs


### Discharge Rates Lithium vs. SLA

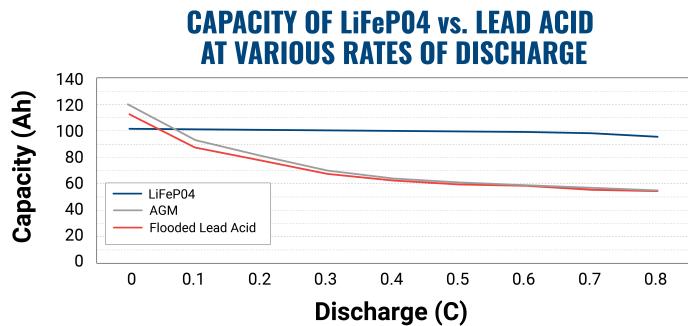


### Lithium Cycle Life

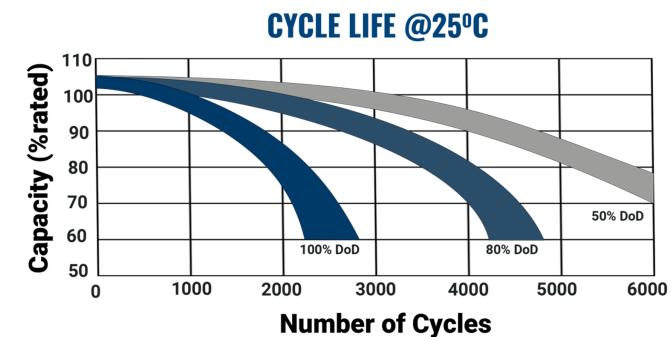

### Lithium Discharge Rates

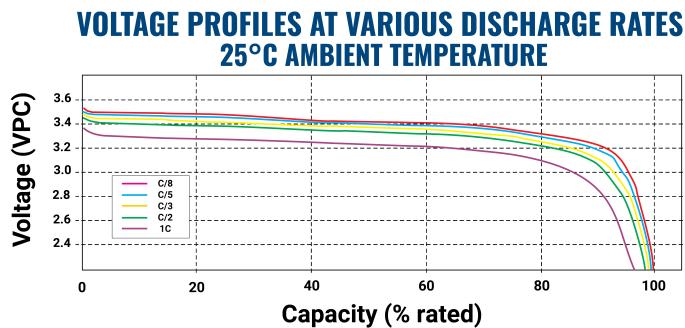

### Lithium Temperature Discharge

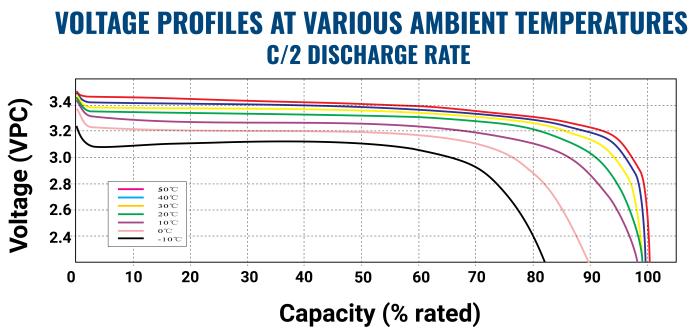

## Protections Circuit Characteristics

Parameter	Condition	Delay	Release
1st Over Discharge Current	A	s	s
2nd Over Discharge Current	A	s	s
Over Charge Current	A	s	s
Cell Over Voltage Protection	V	s	V
Cell Under Voltage Protection	V	s	V
Short Circuit Protection Current	A	ms	s

## Charging

Cycle Applications: Apply constant voltage charge at 3.60VPC – 3.65VPC (14.4 to 14.6 volts for 12V Monobloc) at 20°C. The initial charging current should be set at less than C/4 Amps. Terminate the charge when the current falls to a 3% capacity rate to avoid overcharging. Stand-By or "Float" Service: Apply constant voltage charge of 3.35VPC – 3.45VPC (13.4 to 13.8 volts for 12V Monobloc) at 20°C. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition. For further charging and maintenance information see the lithium resource center on Power-Sonic.com.

## Engineering Drawing

## For Further Information

Please refer to our website, [www.power-sonic.com](http://www.power-sonic.com), for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certification, etc.

## Approvals



Intertek



ETL certification verifies product safety and performance through Intertek testing for reliable battery compliance.



Extended mineral reporting meets global supply chain transparency standards for responsible and ethical sourcing practices.



Manufactured with UL 1642 certified lithium cells ensuring battery safety, durability, and regulatory compliance.



REACH compliant with EU chemical safety standards ensuring restricted substances are controlled in all battery components.



RoHS compliance ensures restriction of hazardous substances in electrical, electronic, and battery-powered products.



SVHC compliant with EU REACH regulations for Substances of Very High Concern used in electrical and energy storage products.



UL 1642 certification for lithium-ion battery safety, reducing fire risk in portable and industrial applications.



UN 38.3 certification ensures lithium batteries meet global transport safety standards for air, sea, and ground.



To ensure safe and efficient operation always refer to the latest edition of our Technical Manual, as published on our website. © 2025. Power-Sonic Corporation. All rights reserved. All trademarks are the property of their respective owners. All data subject to change without notice. E&OE.

Updated 12/19/2025 2:49 AM

Version 1.0