

PSS-2V700

2V High Capacity
PSS-2V Series - Long Life Standby




Performance Specs

Nominal Voltage	2.0 Volts, (1.0 cells)
Nominal Capacity	
20-hr. (31.8A to 1.8 Volts)	636.0Ah
10-hr. (60.0A to 1.8 Volts)	600.0Ah
5-hr. (107.4A to 1.7 Volts)	537.0Ah
1-hr. (368.1A to 1.6 Volts)	368.1Ah
Approximate Weight	81.57lbs, (37.0kg)
Dimensions	
+/- 0.08 in. (+/- 2mm) for length, width, and height dimensions	L: 11.81in, 300.0mm W: 6.89in, 175.0mm H: 12.99in, 330.0mm TH: 13.78in, 350.0mm
Internal Resistance (approx.) mΩ	0.4mΩ
Max Short Circuit Discharge Current	6600.0A
Operating Temperature Range	
Charge	5°F (-15°C) to 104°F (40°C)
Discharge	-4°F (-20°C) to 122°F (50°C)
Case	ABS Plastic Rated to UL94:HB
Recommended Power-Sonic Charger	

Configuration Options

Available Terminals (mm)

T11 THREADED INSERT
- 8mm STUD




Graphs

Capacity Retention SLA




PS Cycle Life

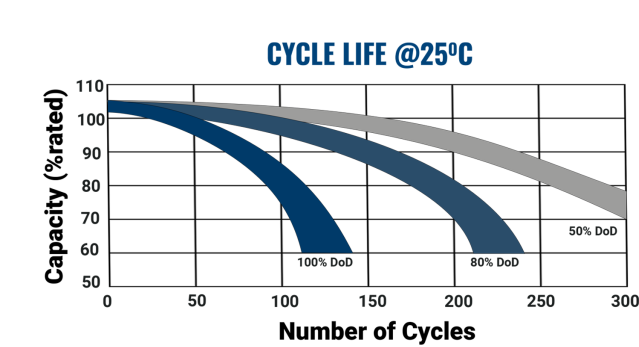

SLA Charging



SLA Float Life 10YR

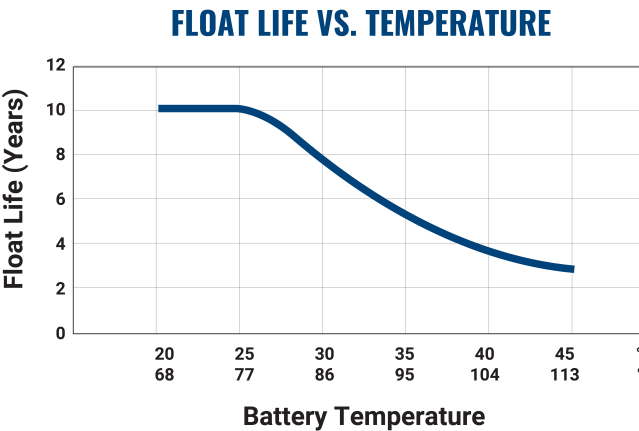

Constant Current

VoltageOverTime 15min		20min	30min	45min	1h	1.5h	2h
1.60V/cell	746.0	630.1	506.2	428.8	368.1	283.3	226.2
1.65V/cell	715.2720999999999	608.9	500.3782999999999	410.7	353.4569999999999	273.09839999999997	218.7203999999999
1.67V/cell	710.3	604.7	496.9	407.8	351.0	271.2	217.2
1.70V/cell	686.1	584.4	483.5	398.8	343.8	266.4	213.6
1.75V/cell	616.5	522.1	454.2	384.2	331.6	257.7	207.0
1.80V/cell	559.0	495.2	434.1	369.2	319.8	249.3	200.8
1.85V/cell	450.4	407.1	378.0	330.2	289.0	227.9	184.6

Constant Power

VoltageOverTime	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V/cell	1297.1	1106.3	888.4	800.0	690.8	536.1	430.5	324.2	258.6	217.2	187.3	150.9	125.1	66.2
1.65V/cell	1257.3	1078.8	879.8	768.8	665.0	517.5	416.3	314.5	251.6	211.7	182.9	147.9	122.8	65.1
1.67V/cell	1257.3	1078.8	879.8	768.8	665.0	517.5	416.3	314.5	251.6	211.7	182.9	147.9	122.8	65.1
1.70V/cell	1222.7	1049.4	864.7	755.7	654.6	510.3	410.9	310.7	248.7	209.5	181.1	146.5	121.9	64.7
1.75V/cell	1111.4	947.0	819.8	733.8	635.8	496.5	400.3	303.3	243.5	205.4	177.7	144.3	120.2	63.9
1.80V/cell	1018.5	907.2	790.4	710.6	617.5	483.3	390.5	296.7	238.4	201.5	174.5	142.0	118.6	63.2
1.85V/cell	829.2	753.1	694.1	640.2	561.7	444.3	360.8	275.3	222.0	187.6	163.1	132.9	111.3	59.9

Charging

Cycle Applications: Apply constant voltage charge at 2.35VPC – 2.45VPC (14.1 to 14.7 volts for 12V Monobloc) at 20°C. The initial charging current should be set at less than C/5 Amps. Switch to float charge when the current falls to a 3% capacity rate to avoid overcharging. **Stand-By or "Float" Service:** Apply constant voltage charge of 2.25VPC – 2.30VPC (13.5 to 13.8 volts for 12V Monobloc) at 20°C. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition. **Temperature Compensation:** Charging voltage for both cyclic and stand-by applications should be regulated in relation to ambient temperature. As temperature rises, charging voltage should be reduced to prevent overcharge and increased as the temperature falls to avoid undercharge. For further charging information, including temperature compensation factors, see the Power-Sonic Technical Manual.

Engineering Drawing

For Further Information

Please refer to our website, **www.power-sonic.com**, for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certification, etc.

Approvals



IEC 60896 standard ensures stationary lead-acid batteries meet safety, performance, and float charge application requirements.



ISO 9001:2015 certification ensures consistent quality management and manufacturing standards for energy storage products.



Sealed lead-acid batteries classified UN2800 non-spillable, certified safe for air, sea, and ground transport worldwide.



UL Recognized mark certifies safety-tested components for electrical reliability in battery and energy storage systems.