






# PG-12V12 12V 12.0 AH @ 20-hr. 12V 11.6 AH @ 10-hr.

**Rechargeable Sealed Lead Acid Battery** PG - Long Life Series


## TERMINALS: (mm)


F2: Quick disconnect tabs, 0.250" x 0.032" - Mate with AMP. INC FASTON "250" series





Torque - Not Applicable

## **DIMENSIONS:** inch (mm)









(EMEA - EUROPE, MIDDLE EAST AND AFRICA)

E: salesEMEA@power-sonic.com

**POWER-SONIC EMEA** 

T NL: + 31 33 7410 700

TUK: +44 1268 560 686

T FR: + 33 344 32 18 17

The Netherlands

Smitspol 4, 3861 RS Nijkerk,

#### **GLOBAL HEADOUARTERS** (USA AND INTERNATIONAL EXCLUDING EMEA)

**Power-Sonic Corporation** 365 Cabela Dr Suite 300, Reno, Nevada 89439 USA T: +1 775 824 6500

E: customer-service@power-sonic.com

To ensure safe and efficient operation always refer to the latest edition of our Technical Manual, as published on our website. © 2018. Power-Sonic Corporation. All rights reserved. All trademarks are the property of their respective owners. All data subject to change without notice. E&0.E

# **FEATURES**

- Absorbent Glass Mat (AGM) technology for superior performance
- Superb high-rate discharge characteristics ensures • reliable performance in UPS and telecom applications
- Proven valve regulated technology that guarantees safe operation without maintenance
- · Rugged impact resistant ABS case and cover
- Thick plate design and efficient gas recombination yield a • service life of 10 - 12 years in standby mode

# **APPROVALS**

- Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified
- U.L recognized
- ISO9001:2015 Quality management systems

## **PERFORMANCE SPECIFICATIONS**

Nominal Voltage	12 volts (6 cells)
Nominal Capacity   20-hr. (0.60A to 10.50 volts)   10-hr. (1.16A to 10.50 volts)   5-hr. (2.13A to 10.50 volts)   1-hr. (7.89A to 9.60 volts)	12.0 AH 11.60 AH 10.65 AH 7.89 AH
Approximate Weight	8.49 lbs. (3.85 kg)
Internal Resistance (approx.)	18.0 milliohms
Max Short-Duration Discharge Cur	rrent (5 Sec.) 180 amps
Shelf Life	

PG series batteries may be stored for up to 6 months at 25 C (77F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.

**Operating Temperature Range** Charge

-4°F (-20°C) to 104°F (40°C) 5°F (-15°C) to 122°F (50°C)

Case

Discharge

ABS Plastic


# power-sonic.com



## **PG-12V12** 12V@12.0AH@20-hr. 12V@11.6AH@10-hr.

Rechargeable Sealed Lead Acid Battery PS – General Purpose Series

### SHELF LIFE & STORAGE

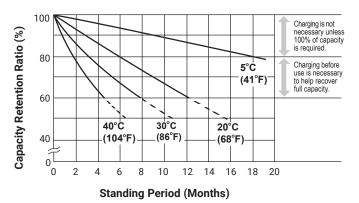

## **CHARGING**

**Cycle Applications:** Apply constant voltage charge at 14.4V – 15.0V at 25°C. Initial charging current should be set at less than 3.6 Amps. Switch to float charge to avoid overcharging.

**"Float" or "Stand-By" Service:** Apply constant voltage charge of 13.5V to 13.8V at 25°C. Initial charging current should be set at less than 3.6 Amps. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition.

**Temperature Compensation:** Charging Voltage for both Cyclic and Standby applications should be regulated in relation to ambient temperature. As temperature rises charging voltage should be reduced to prevent overcharge and increased as temperature falls to avoid undercharge.

For further charging information including temperature compensation factors, see Power Sonic Technical Manual/ Power Sonic Charger specifications.

# **APPLICATIONS**

A whole range of CYCLIC applications including but not limited to:

- Fire and Security
- Telecommunications

#### GLOBAL HEADQUARTERS (USA AND INTERNATIONAL EXCLUDING EMEA)

Power-Sonic Corporation 365 Cabela Dr Suite 300, Reno, Nevada 89439 USA T: +1 775 824 6500 E: customer-service@power-sonic.com

- Emergency
  - Solar

Utility


- WindUPS
- Lighting UPS

#### **POWER-SONIC EMEA** (EMEA – EUROPE, MIDDLE EAST AND AFRICA) Smitspol 4, 3861 RS Nijkerk,

The Netherlands T NL: + 31 33 7410 700 T UK: + 44 1268 560 686 T FR: + 33 344 32 18 17 E: salesEMEA@power-sonic.com

To ensure safe and efficient operation always refer to the latest edition of our Technical Manual, as published on our website. © 2018. Power-Sonic Corporation. All rights reserved. All trademarks are the property of their respective owners. All data subject to change without notice. E&0.E

## LIFE CHARACTERISTICS IN STAND-BY USE

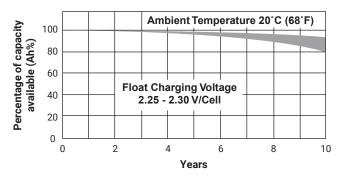

## **CHARGERS**

Power Sonic offers a wide range of chargers suitable for batteries with a variety of capacities.

Please refer to our website for more information on our switch mode and transformer type chargers.

Please contact our technical department for advice if you have difficulty in locating a suitable charger.

# **FURTHER INFORMATION**

Please refer to our website **www.power-sonic.com** for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certification, etc.

