

PG-2V600

2V Telecom and Utility Cells
PG 2V Series - 2V Long Life



Engineered with advanced AGM, the PG 2V series delivers strong durability and long service life, ensuring consistent performance in demanding standby power environments. With a thick plate design, these batteries provide reliable standby power for critical applications such as telecom, networking, and military systems.

Configuration Options

- PG-2V600 FR M8
- PG-2V600 M8

Performance Specs

Nominal Voltage 2.0 Volts, (1.0 cells)

Nominal Capacity

20-hr. 600.0Ah (31.8A to 1.8 Volts)	636.0Ah
10-hr. 600.0Ah (60.0A to 1.8 Volts)	600.0Ah
5-hr. 537.0Ah (107.4A to 1.7 Volts)	537.0Ah
1-hr. 368.1Ah (368.1A to 1.6 Volts)	368.1Ah

Approximate Weight 81.57lbs, (37.0kg)

VDS Weight lbs, (kg)

Dimensions

+/- 0.08 in. (+/- 2mm) for length, width, and height dimensions

L: 11.81in, 300.0mm

W: 6.89in, 175.0mm

H: 12.99in, 330.0mm

TH: 13.78in, 350.0mm

Internal Resistance (approx.) mΩ 0.4mΩ

Max Short Circuit Discharge Current 6600.0A

Operating Temperature

Range


Charge	-4°F (-20°C) to 104°F (40°C)
Discharge	5°F (-15°C) to 122°F (50°C)

Case ABS Plastic Rated to UL94:HB, ABS (UL94 HB or V-0 optional)

Recommended Power-Sonic Charger


Available Terminals (mm)

**T11 THREADED INSERT
- 8mm STUD**




Graphs


Capacity Retention SLA

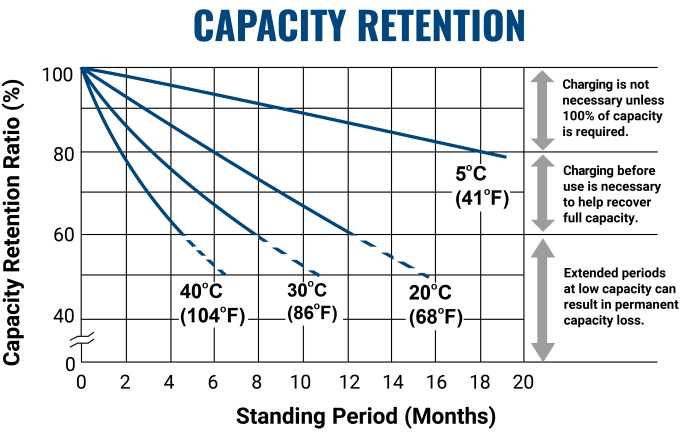


PS Cycle Life

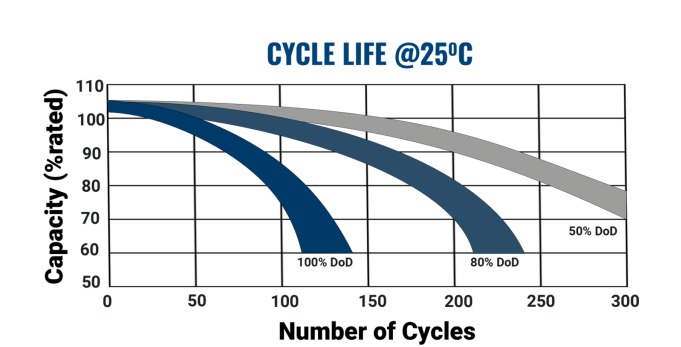

SLA Charging

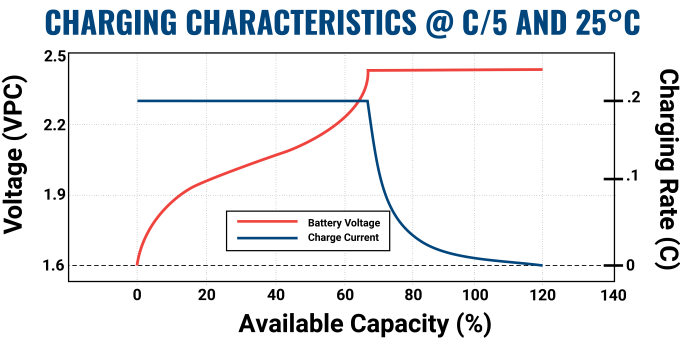

SLA Float Life 10YR

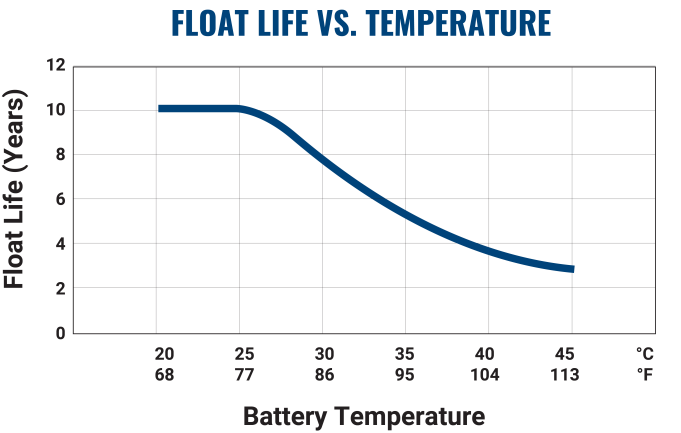

Constant Current

VoltageOverTime 15min		20min	30min	45min	1h	1.5h	2h
1.60V/cell	746.0	630.1	506.2	428.8	368.1	283.3	226.2
1.65V/cell	715.2720999999999	608.9	500.3782999999999	410.7	353.4569999999999	273.09839999999997	218.7203999999999
1.67V/cell	710.3	604.7	496.9	407.8	351.0	271.2	217.2
1.70V/cell	686.1	584.4	483.5	398.8	343.8	266.4	213.6
1.75V/cell	616.5	522.1	454.2	384.2	331.6	257.7	207.0
1.80V/cell	559.0	495.2	434.1	369.2	319.8	249.3	200.8
1.85V/cell	450.4	407.1	378.0	330.2	289.0	227.9	184.6

Constant Power


VoltageOverTime	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V/cell	1297.1	1106.3	888.4	800.0	690.8	536.1	430.5	324.2	258.6	217.2	187.3	150.9	125.1	66.2
1.65V/cell	1257.3	1078.8	879.8	768.8	665.0	517.5	416.3	314.5	251.6	211.7	182.9	147.9	122.8	65.1
1.67V/cell	1257.3	1078.8	879.8	768.8	665.0	517.5	416.3	314.5	251.6	211.7	182.9	147.9	122.8	65.1
1.70V/cell	1222.7	1049.4	864.7	755.7	654.6	510.3	410.9	310.7	248.7	209.5	181.1	146.5	121.9	64.7
1.75V/cell	1111.4	947.0	819.8	733.8	635.8	496.5	400.3	303.3	243.5	205.4	177.7	144.3	120.2	63.9
1.80V/cell	1018.5	907.2	790.4	710.6	617.5	483.3	390.5	296.7	238.4	201.5	174.5	142.0	118.6	63.2
1.85V/cell	829.2	753.1	694.1	640.2	561.7	444.3	360.8	275.3	222.0	187.6	163.1	132.9	111.3	59.9



Charging

Cycle Applications: Apply constant voltage charge at 2.35VPC – 2.45VPC (14.1 to 14.7 volts for 12V Monobloc) at 20°C. The initial charging current should be set at less than C/5 Amps. Switch to float charge when the current falls to a 3% capacity rate to avoid overcharging. **Stand-By or "Float" Service:** Apply constant voltage charge of 2.25VPC – 2.30VPC (13.5 to 13.8 volts for 12V Monobloc) at 20°C. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition. **Temperature Compensation:** Charging voltage for both cyclic and stand-by applications should be regulated in relation to ambient temperature. As temperature rises, charging voltage should be reduced to prevent overcharge and increased as the temperature falls to avoid undercharge. For further charging information, including temperature compensation factors, see the Power-Sonic Technical Manual.

Engineering Drawing

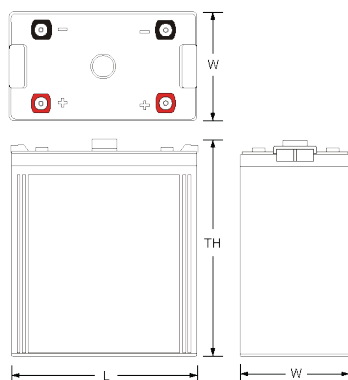

For Further Information

Please refer to our website, www.power-sonic.com, for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certification, etc.

Approvals



CE marking confirms a product meets EU safety, health, and environmental protection standards for battery and energy systems.



Conflict-free mineral certification ensuring ethical sourcing and transparent supply chain for responsible production.



Extended mineral reporting meets global supply chain transparency standards for responsible and ethical sourcing practices.



IEC 60896 standard ensures stationary lead-acid batteries meet safety, performance, and float charge application requirements.



ISO 9001:2015 certification ensures consistent quality management and manufacturing standards for energy storage products.



PFAS-free certification verifying environmentally responsible manufacturing of batteries and energy storage technologies.



California Proposition 65 compliant, providing consumer safety through reduced chemical exposure in battery manufacturing.



REACH compliant with EU chemical safety standards ensuring restricted substances are controlled in all battery components.



RoHS compliance ensures restriction of hazardous substances in electrical, electronic, and battery-powered products.



Sealed lead-acid batteries classified UN2800 non-spillable, certified safe for air, sea, and ground transport worldwide.



SVHC compliant with EU REACH regulations for Substances of Very High Concern used in electrical and energy storage products.



U.S. EPA TSCA compliance ensures toxic substances are regulated for safe manufacturing of batteries and electronic components.



UL 1989 certified for valve-regulated and vented lead-acid batteries used in UPS, emergency, and backup power applications.



Phone (US): (775) 825-6500
Phone (EMEA): +31 33 7410 700
Email (US): Sales@Power-Sonic.com
Email (EMEA): SalesEMEA@Power-Sonic.com
www.power-sonic.com

To ensure safe and efficient operation always refer to the latest edition of our Technical Manual, as published on our website. © 2025, Power-Sonic Corporation. All rights reserved. All trademarks are the property of their respective owners. All data subject to change without notice. E&O.E

Updated 10/24/2025 5:26 AM

Version 1.0